



投影產品專門店



TABLE OF CONTENTS

電動地升幕	2
VIVIDSTORM S-ALR 常規/長焦 抗光灰幕 電動地升幕 黑色機箱 (16:9)	2
VIVIDSTORM S-WC 常規/長焦 電動地升幕 白幕/黑邊/黑色機箱 (16:9)	14
快速折疊幕	32
AOV 4:3 快速折疊幕 多尺寸選擇 (Quick Folding Screen)	32



電動地升幕




適合常規/長焦投影機
抗光灰幕系列




灰幕抗光 · 電動地升幕

適合常規/長焦投影機

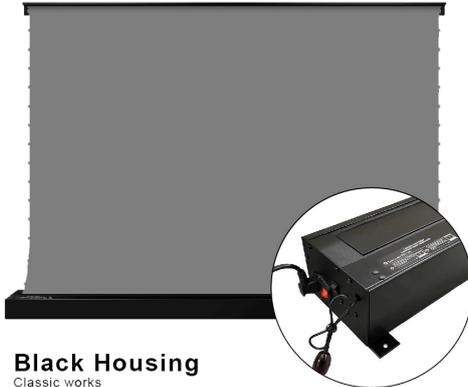

Black Housing
Classic works

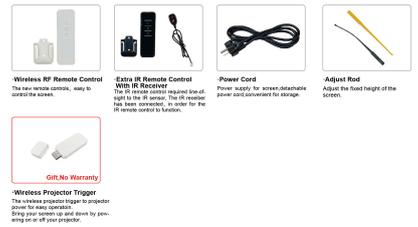

Wireless RF Remote Control
The new remote control, easy to operate screen.

Extra IR Remote Control
With IR Receiver
The IR receiver control is required line of sight to the IR sensor. The IR receiver has been connected, in order for the IR remote control to function.

Power Cord
Power supply for screen detaches, please use convenient to storage.

Adjust Rod
Adjust the fixed height of the screen.



Gift, No Warranty
Wireless Projector Trigger
The wireless projector trigger to projector power for auto operation.
Bring your screen to auto mode by pressing on or off your projector.



S Electric Tab-Tension Floor Screen
Obsidian Long Throw Ambient Light Rejecting
Enjoy Your 4K HD Home Theater

A Projection Screen That Rises From The Ground


Open your home theater easily.
The screen, which rises from the ground, is not only convenient for activities, but also does not need to be installed through holes in the wall.



The screen closing

No Longer Afraid Of The Day Or The Light

No hole, no installation, portable and mobile.



Enjoy your 3D visuals in HD home theater
S Electric Tab-Tension Floor Screen
3D Obsidian Long Throw Ambient Light Rejecting




No Drilling Is Required

You don't need to drill holes in the wall or floor to use the screen, but make sure it's placed on a flat surface.

Wrinkles Free

Screen with built-in design, plus metal strong support, better stretch the screen, prevent curling, and other phenomena.



Tab-Tensioned Technology
No more curling

Imported Light Resistant Screen

Anti light upgrade, in the ambient light has a weakening effect, so that you can watch movies in the daytime.



Traditional white Screen material

Obsidian Long Throw ambient Light Rejecting Screen material



Bigger Size, More Wonderful Visual Enjoyment
Screen size: 72"-150"



3D View More Wonderful
The screen supports the projection of 3D images, making the family view more wonderful.



Assemble Brand Motor
Smooth operation at all positions, quiet and steady

- DC power supply, energy saving and environmental protection
- Ultra quiet design: The world's leading silent patent technology, built into the motor structure design, up to the silent operation, noise as low as 26dB
- Limit adjustment: Precise limit structure, adjust the ideal height
- Overheating protection: Overheated automatic power-off, built into the motor structure to ensure the safety and health of the motor

4K HD Visual Feast
Support 4K ultra high definition resolution to build luxury HD home theater



Panoramic View

Multiple people share a 150° HD view, no matter where they sit. Enjoy the same scene, gorgeous 4K HD picture

PRODUCT DETAILS



Important Reminder

Due to the large size of the anti light curtain, please measure the elevator and corridor of your home before purchase. For the moment, only elevator direct delivery is supported, not corridor delivery. If the elevator cannot reach the destination, the delivery will be delivered to the elevators, and you can arrange the transportation by yourself. You can negotiate with the express delivery or handle the extra stair handling costs (please contact customer service for details).

Custom Service


If you need to customize the curtain of special size, please contact the online customer service. After the price is determined, we will make it for you as soon as possible!

3-Shell® Screen Floor Screen 3-Shell® Obsidian Long Throw Ambient Light Rejecting Screen material

Aperture Ratio	Diag. Size	Standard View Area		Overall Case Length (including Screen and Spigot)		Overall Height	Spigot Center Case	Parking Dimension	C.M	R.W
		W	H	L	L2					
30%	72"	1536	866	1650	2070	1211	1800x240x100	28.00	23.00	
	84"	1814	1026	1937	2364	1346	2100x240x100	28.00	24.00	
	96"	2092	1186	2225	2658	1481	2400x240x100	28.00	25.00	
	108"	2370	1346	2513	2952	1616	2700x240x100	28.00	27.00	
	120"	2648	1506	2802	3246	1751	3000x240x100	33.00	30.00	
	132"	2926	1666	3091	3540	1886	3300x240x100	33.00	32.00	
35%	108"	2370	1346	2513	2952	1616	2700x240x100	33.00	30.00	
	120"	2648	1506	2802	3246	1751	3000x240x100	33.00	32.00	
	132"	2926	1666	3091	3540	1886	3300x240x100	33.00	32.00	

Warm tips, if you mind the following conditions do not purchase! ! ! !

- When there are a few black spots, white spots, stains and other impurities on the screen surface, but if they are qualified according to the detection method, then such situation is not a product quality problem, and it is within the scope of product qualification.

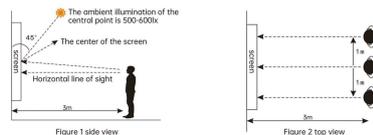

The detection method is as follows:

- Please raise the screen of this product and close to the wall, and the observer can observe the film at a distance of 5 meters away from the screen;
- The observer needs to observe the shadow in the normal light environment (illumination 500-600lx);
- The distance between the observer and the front of the screen should be kept at a distance of 3 meters, and the center point of the screen should be close to or higher than the horizontal line of sight (as shown in Figure 1), and the observation should be made at the center point, 1m to the left and 1m to the right (as shown in Fig. 2).

As long as the test results of the product are within the allowable range, the product is qualified.


- For the black spot defect which can be measured in appearance, if it can not be found by visual inspection, the product is normal.
- For the appearance of specific measurable white spot defects, if visual inspection can not be found, then the product is normal.
- If the visible dirt is within the allowable range of defects, the product is normal.
- For the faint linear printing trace, if within the allowable range of defects, the product is normal.
- For the ink caused by uneven printing traces, if within the allowable range of defects, the product is normal.

- The white screen is listed as the quality standard because it is not only the reflection surface of the projector image (the black surface is observed from the upper and lower direction, and the white surface is observed from the bottom direction), but also the main function surface of the viewing image, so the white screen is listed as the quality standard. It should be noted that if the white screen surface does not exceed the quality specification, it will be regarded as meeting the factory qualification standard.
 - Different from the white screen, the black screen is used as a functional surface to absorb indoor ambient light. In view of the fact that there is no direct correlation between the black screen surface and the image viewing quality, its quality specifications are quite different from that of the white surface. It should be noted that the slight black marks on the black screen surface are inevitable appearance phenomena in the production process of industrial products, which meet the factory qualification standard.
- Conclusion: it should be noted that the slight black marks and white spots on the black screen surface of the anti light projection screen products are normal product appearance phenomena, which will never affect the image viewing quality. Please use it at ease.

- If there are regular creases on the screen surface after the screen is opened, don't worry. This is a normal phenomenon. It is caused by the screen being curled and tightened for a long time, which does not affect the user's viewing. After opening the screen for a period of time, you will notice that the stripes on the screen will gradually disappear.



- Please note that when placing this product, please make sure that the product is always in a horizontal state. Do not place the screen in an inclined or vertical position.
- After using for a period of time, if the cover on both ends of the screen is slightly tilted, there is no need to worry. This is a normal phenomenon and does not affect the viewing and use. In addition, due to the cover warping, there is a gap between the screen and the housing case after closing, which is also a normal phenomenon.



3-Shell® Screen Floor Screen 3-Shell® Obsidian Long Throw Ambient Light Rejecting Screen material

Aperture Ratio	Diag. Size	Standard View Area		Overall Case Length (including Screen and Spigot)		Overall Height	Spigot Center Case	Parking Dimension	C.M	R.W
		W	H	L	L2					
30%	72"	1536	866	1650	2070	1211	1800x240x100	28.00	23.00	
	84"	1814	1026	1937	2364	1346	2100x240x100	28.00	24.00	
	96"	2092	1186	2225	2658	1481	2400x240x100	28.00	25.00	
	108"	2370	1346	2513	2952	1616	2700x240x100	28.00	27.00	
	120"	2648	1506	2802	3246	1751	3000x240x100	33.00	30.00	
	132"	2926	1666	3091	3540	1886	3300x240x100	33.00	32.00	
35%	108"	2370	1346	2513	2952	1616	2700x240x100	33.00	30.00	
	120"	2648	1506	2802	3246	1751	3000x240x100	33.00	32.00	
	132"	2926	1666	3091	3540	1886	3300x240x100	33.00	32.00	



VIVIDSTORM S ALR 電動地升 常規/長焦抗光幕
一鍵開啟你的次世代影院

免打孔設計 折箱插電即用
你不需要在牆上或地板上打孔來安裝幕布 懸掛幕布它放在一個平面上




全新的觀影體驗

- 電腦音頻 音頻輸出
- 無線控制 幕布控制
- 150°視角 全方位觀看
- 幕布升降 幕布升降
- 7.1x15呎 更多尺寸選擇
- 幕布幕布 幕布幕布

精彩的3D效果
在家也能享受影院級3D影像

進口抗光幕布

即使環境光干擾，讓家庭影院不分晝夜，白天也能享受清晰影像。

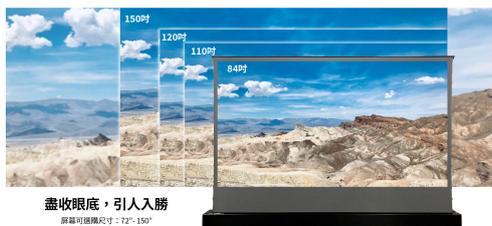

皆“大”歡喜
全家圍觀時，屏會傾斜到150度無死角，全場大視角。

幕平如鏡

幕面採用拉線設計，完美的呈現原始畫面，幕面無自然變形。



產品詳情



幕布上地面圖(單位為英寸)

幕布上地面圖(單位為英寸)

幕布上地面圖(單位為英寸)

幕布尺寸	幕布寬度	幕布高度	幕布深度	幕布重量	幕布厚度	幕布顏色	幕布材質	幕布類型	幕布價格
72"	1936	896	1010	2075	1211	1900x240x110	24.00	2100	2100
84"	2256	1044	1170	2364	1346	2200x240x110	25.00	2300	2300
96"	2576	1192	1330	2653	1481	2500x240x110	26.00	2500	2500
108"	2896	1340	1490	2942	1616	2800x240x110	27.00	2700	2700
120"	3216	1488	1650	3231	1751	3100x240x110	28.00	2800	2800
132"	3536	1636	1810	3520	1886	3400x240x110	29.00	2900	2900
144"	3856	1784	1970	3809	2021	3700x240x110	30.00	3000	3000
156"	4176	1932	2130	4098	2156	4000x240x110	31.00	3100	3100

幕布尺寸：多工材料，可根據需求1.5x+的長度。

VIVIDSTORM S-ALR 常規/長焦 抗光灰幕 電動地升幕 黑色機箱 (16:9)

- 抗光幕布材質，推薦用於普通/標準/長焦投影機使用
- 在弱光環境下表現出色- 建議投影機具有2200ANSI 或更高的真實流明
- 電動升降-收放自如，不佔空間
- 雙彈簧V型支架系統，幕面緊繃平直
- 0.8增益，150°視不挑角度，兼容3D/4K/8K高清視覺盛宴
- 多種控制方式實現上下約20-30秒！無線遙控
- 即插即用，快速安裝，無需鑽孔安裝，節省空間的設計
- 72吋-200吋可選擇 (因尺寸及重量限制，超過120吋只能送貨到樓下；72吋至120吋需要客人確認樓宇電梯能放入投影幕，及運送到指定樓層，才能安排送貨上門)
- 品牌靜音管狀電機

支援常規/長焦投影機，進口抗光幕布，支援4K投影效果，高對比度，高度還完色彩，一鍵升降，帶遙控

(如需白色機箱款，或需要135吋以上，請聯絡本店查詢 3188 4814)

VIVIDSTORM 所有專業投影幕一覽表






VIVIDSTORM
S ALR 電動地升 常規/長焦抗光幕
一鍵開啟你的次世代影院

更大的屏幕，更大的尺寸

屏幕尺寸：72"- 150"

根據空間大小/個人喜好
選擇合適的屏幕尺寸，
讓觀看更舒適。

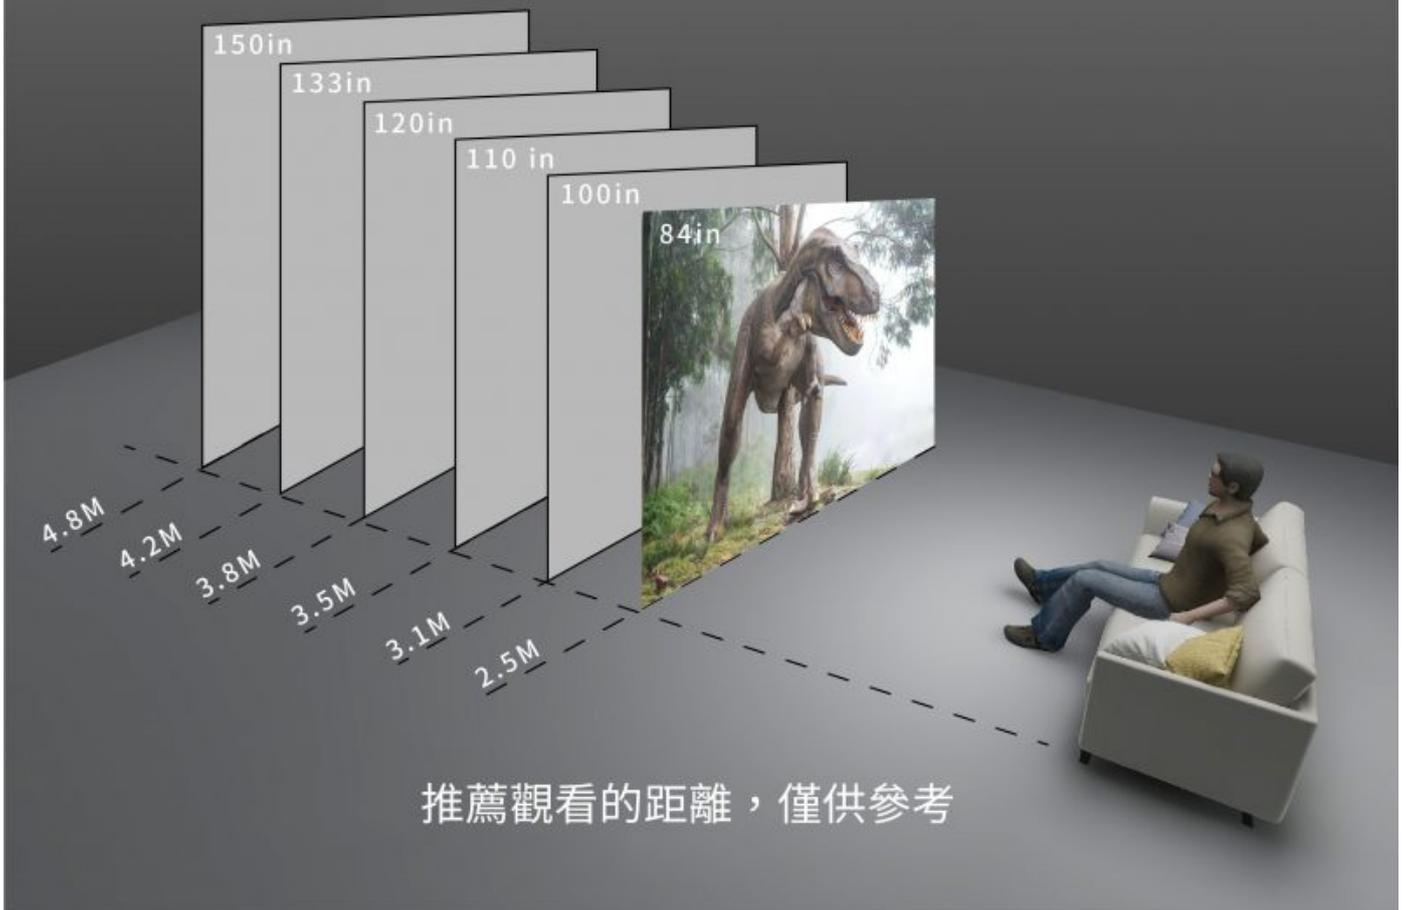

推薦觀看距離：至少2.5米



全新的觀影體驗



電動升降
收放自如



無線遙控
遠程控制



150°視角
全方位顯示



護眼技術
呵護視力健康



72吋-150吋
更多尺寸選擇



品牌電機
靜音驅動

無中“升”有

一鍵開啟
可收納隱藏的巨幕



屏幕打開



屏幕关上



免打孔設計 拆箱插電即用

你不需要在牆上或地板上打孔來安裝屏幕
但要確保它放在一個平坦的平面

幕平如鏡

幕面採用拉線設計，完美的呈現原始畫面，幕面無曲線波紋。



拉線工藝，沒有更多的褶皺

進口抗光幕布

拒絕環境光干擾，讓家庭影院不分晝夜
白天也能享受清晰影像




白天/光照環境對比

傳統幕面



白天/光照環境對比

高清抗光幕

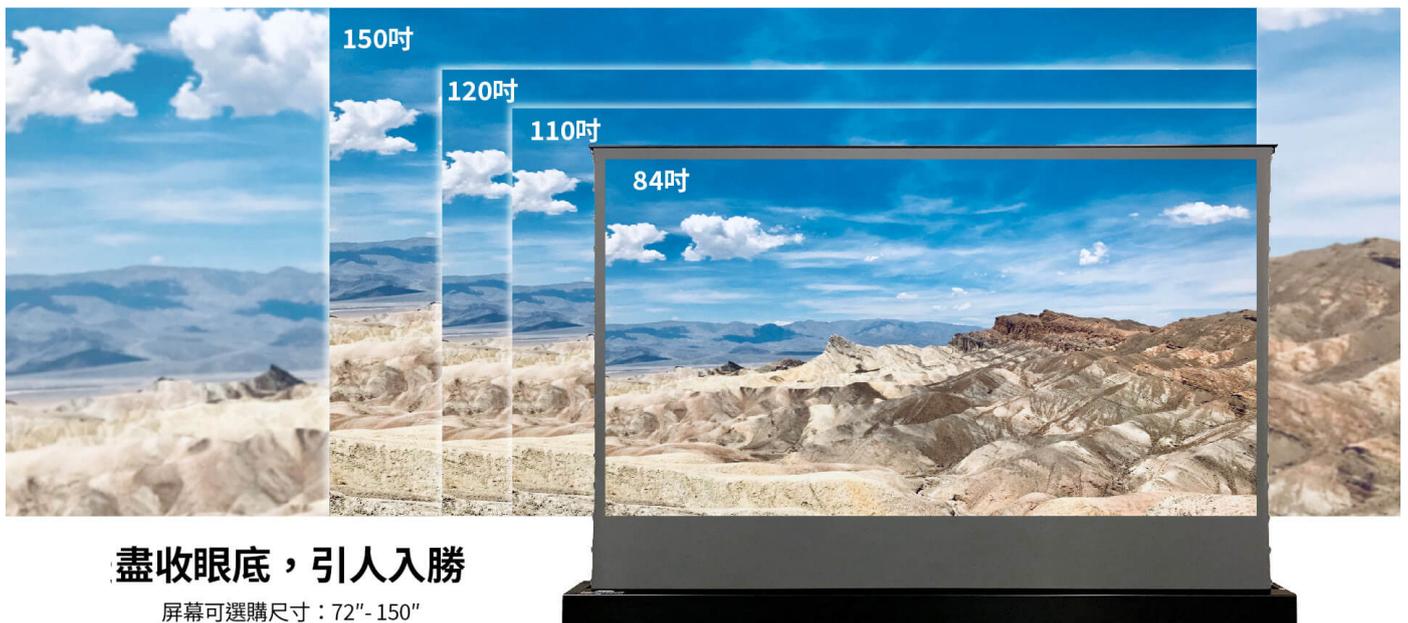

盡收眼底，引人入勝

屏幕可選購尺寸：72"-150"



精彩的3D效果

在家也能享受影院級3D影像



裝配品牌電機

奧科同步靜音管狀電機,運行流暢

直流供電

直流供電, 節能環保

靜音設計

領先的靜音專利技術, 斜齒超靜音結構設計; 實現運行噪音低至30dB的靜音效果

限位調節


精準限位結構, 調節理想高度


過熱保護

過熱自動斷電保護, 保障電機安全健康

4K高清視覺盛宴

屏幕支持4K投影(主要以投影機畫面質量為主)
暢享高清視覺盛宴

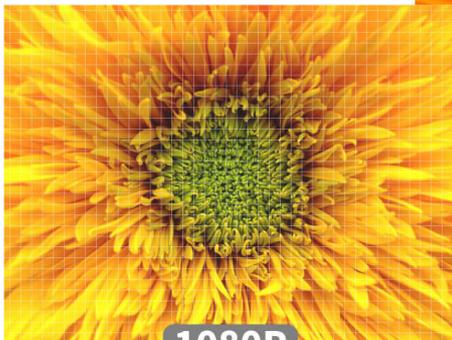

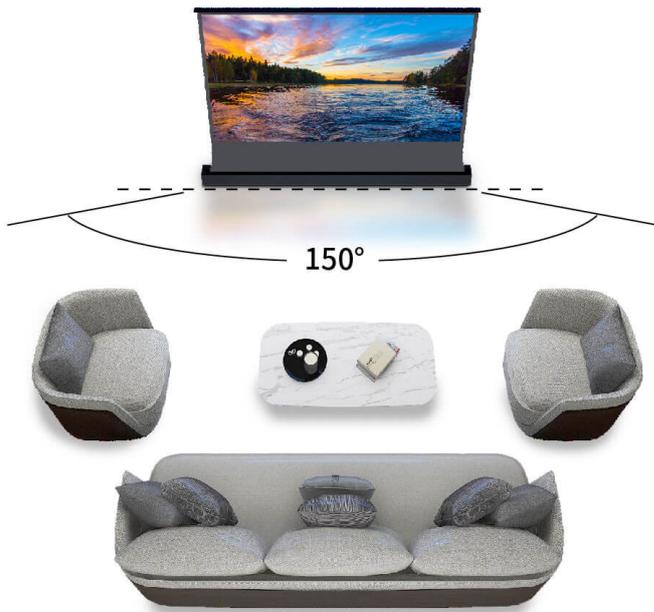

皆“大”歡喜

全家總動員，聚會無限制，150度無死角，全景大視角。

產品詳情



拉線工藝

屏幕搭配拉線設計，拉伸幕面更好的保證幕面平整，防止捲邊褶皺等現象。



電動升降

方便快捷



鋁合金頂蓋

筆直而牢固



雙V型支撐系統

強力支撐幕布，使幕布平整



可旋轉固定底座


更牢固的同時更安心




黑色機箱

經典百搭




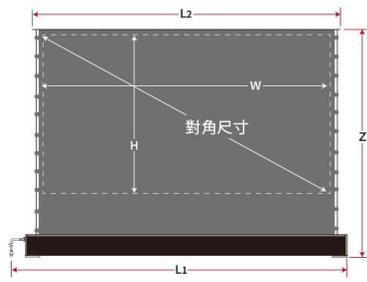

屏幕主視圖(實際投影面積在虛線內)



機箱側視圖



機箱側視圖(頂蓋尺寸)



S 常規/長焦 電動地升幕 -灰幕-									
投影區 比例	投影面積 對角尺寸	投影面積尺寸		總長度 (含電線占用空間)	頂蓋長度	屏幕總高度	包裝尺寸	毛重	淨重
	(inch)	W	H	L1	L2	Z	mm	Kgs	Kgs
16:9	72"	1594	896	1831	1670	1211	1900×240×210	24.00	23.00
	84"	1860	1046	2077	1905	1436	2150×240×210	25.00	24.00
	92"	2037	1145	2257	2081	1535	2300×240×210	26.00	25.00
	100"	2214	1245	2431	2276	1635	2500×240×210	28.00	27.00
	110"	2435	1370	2687	2528	1760	2740×240×210	31.00	30.00
	120"	2656	1494	2910	2730	1884	2970×240×210	33.00	32.00
	135"	2989	1680	3222	3041	2030	3350×240×210	37.00	36.00
150"	3321	1867	3587	3395	2257	3650×240×210	39.00	38.00	


*單位(mm), 手工制作, 可能會有1-1.5mm的偏差。

Aspect Ratio	Diag.Size	Standard View Area		Overall Case Length including space occupied by plug and wire	Upper cover size	Overall Height	Packing Dimension	G.W	N.W
	(inch)	W	H	L1	L2	Z	mm	Kgs	Kgs
16:9	160"	3542	1992	3849	3652	2500	3949×260×220	50.00	40.00
16:9	170"	3763	2116	4070	3960	2600	4170×260×220	55.00	45.00
16:9	180"	3985	2241	4300	4100	2800	4300×260×220	59.00	49.00
16:9	200"	4428	2490	4700	4540	2900	4800×260×220	63.00	53.00

*單位(mm), 手工制作, 可能會有1-1.5mm偏差。

! 溫馨提示，如介意以下情況請慎拍!!

1、屏幕表面能看到少許黑點、白點、污點等雜質，根據檢測方法檢測合格，則在產品合格範圍內。

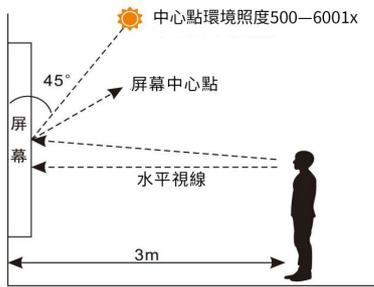



- (1) 白幕面為投影機影像的反射面（從幕面上方向下觀測為黑色面，從下方向上觀測為白色面），是觀賞影像的主功能面，故列為品質標準。白面無超出品質規格即符合出廠合格標準。
- (2) 黑面為吸收室內環境光的功能面，與影像觀賞品質無直接相關，其品質規格與白面不同。反映的輕微黑色痕跡屬於工業製成商品生產過程中不可避免的外觀現象，符合出廠合格標準。

總結：抗光投影銀幕產品黑面所見的輕微黑色痕跡以及白點等為正常的產品外觀現象，絕對不會影響影像觀賞品質，請客戶安心使用。


檢測方法：

- ①將屏幕升起貼近牆面，觀測者直立站於距離屏幕3m遠的距離；
- ②觀測者須在正常光照環境下（照度500—600lx）進行觀察；
- ③觀測者與屏幕正面距離3m觀察，且屏幕中心點須貼齊或高於水平視線（如圖1），並於中心點、向左位移1m、向右位移1m做觀察（如圖2）。

檢測結果在容許度範圍內則屬合格產品。

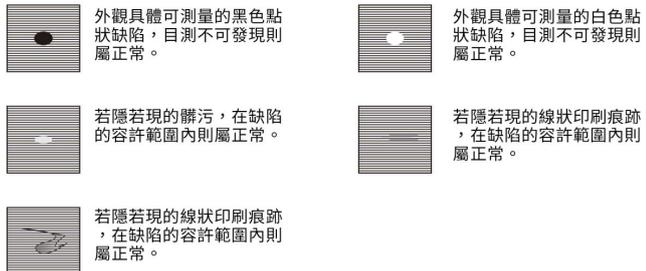


2、屏幕在打開後，幕面上出現有一道道規律的淺顯摺痕，這是由於幕布長時間處於捲曲收緊狀態引起的，屬於正常現象，不影響觀影。將幕布打開，經過一段時間後，幕布上的條紋會逐漸消失。

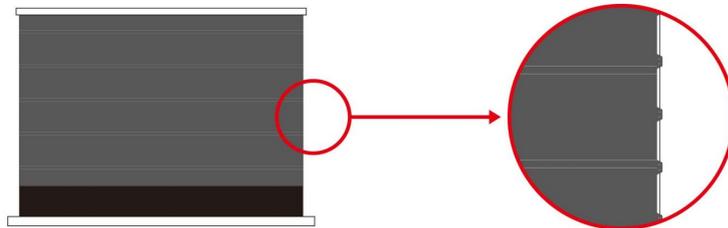

3. 放置設備時，請確保設備始終保持水平狀態，不可將幕布傾斜或者垂直放置；

4. 屏幕在使用一段時間後，屏幕上方兩端蓋子稍微翹起屬於正常現象，不影響觀影。由於蓋子翹起，導致屏幕關閉後與罩殼有縫隙，也屬於正常現象

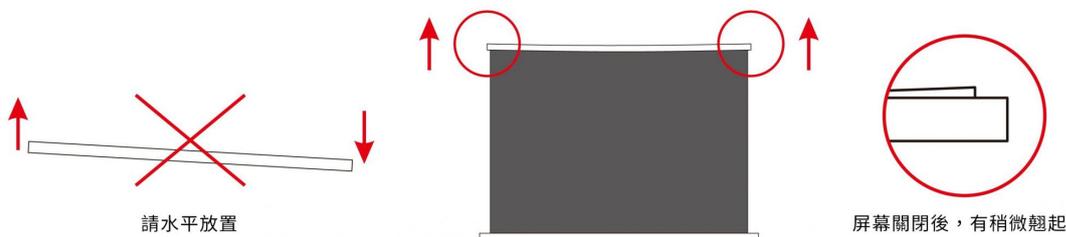



無線RF射頻遙控
全新遙控器，輕鬆控制畫面。



額外紅外遙控器，及紅外接收器
投影幕插上紅外遙控器，紅外遙控器就能正常工作。



電源線
屏幕供電，可拆卸電源線，方便收納。



調整桿
插入投影幕的調整孔，調整屏幕的固定高度。



Gift, No Warranty

投影幕升降無線觸發器(贈品)
插在投影機USB接口，待投影機開關電源時，自動觸發投影幕的升降。

[Read More](#)


SKU: S-VIVIDSTORM-ES-SALR-TENSION-72-120

Price: \$5600 – \$20868

分類: [電動地升幕](#)




**適合常規/長焦投影機
戲院PVC自幕系列**

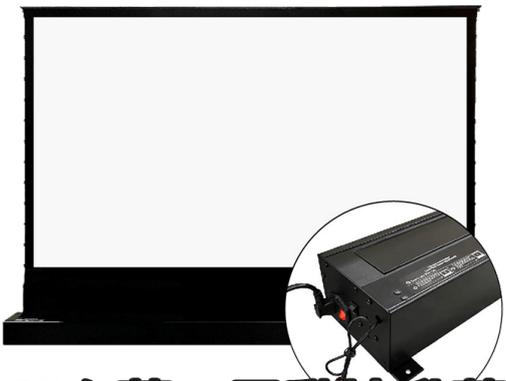

PVC自幕 · 電動地升幕

適合常規/長焦投影機

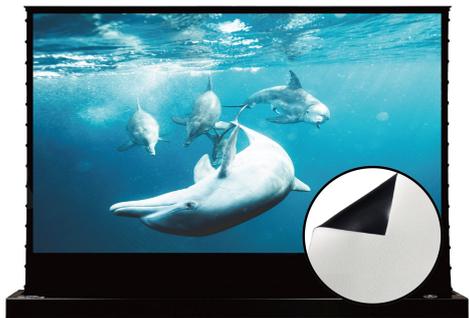

Black Housing
Classic works



Black Housing
Classic works



Wireless RF Remote Control With IR Receiver
The RF remote control is easy to control the screen.

Extra IR Remote Control With IR Receiver
The IR remote control is easy to control the screen. The IR remote has laser connected, in order for the wireless remote to function.

Power Cord
Power supply to screen, detachable power cord convenient for storage.

Adjust Rod
Adjust the fixed height of the screen.

Gift No Warranty



S Electric Tab-Tension Floor Screen HD White Cinema
A More Modern Way To Open The Screen



S Electric Tab-Tension Floor Screen HD White Cinema
A More Modern Way To Open The Screen



A New And Fashionable Way Of Watching Movies

No hole, no installation, portable and flexible.

A Projection Screen That Rises From The Ground

Open your home theater easily. The screen, which rises from the ground, is not only convenient for activities, but also does not need to be installed through holes in the wall.



No Drilling Is Required
You don't need to drill holes in the wall or floor to use the screen, but make sure it's placed on a flat surface.



Wireless RF Remote Control With IR Receiver
The RF remote control is easy to control the screen.

Extra IR Remote Control With IR Receiver
The IR remote control is easy to control the screen. The IR remote has laser connected, in order for the wireless remote to function.

Power Cord
Power supply to screen, detachable power cord convenient for storage.

Adjust Rod
Adjust the fixed height of the screen.

Gift No Warranty



S Electric Tab-Tension Floor Screen HD White Cinema
A More Modern Way To Open The Screen



S Electric Tab-Tension Floor Screen HD White Cinema
A More Modern Way To Open The Screen



A New And Fashionable Way Of Watching Movies

No hole, no installation, portable and flexible.

A Projection Screen That Rises From The Ground

Open your home theater easily. The screen, which rises from the ground, is not only convenient for activities, but also does not need to be installed through holes in the wall.




No Drilling Is Required
You don't need to drill holes in the wall or floor to use the screen, but make sure it's placed on a flat surface.



Wrinkles Free

Screen with cable design, plus metal strong support, better stretch the screen, prevent curling and other phenomena.

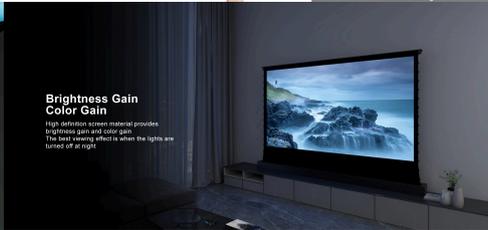

Brightness Gain Color Gain

High definition screen material provides brightness gain and color gain. The best viewing effect is when the lights are turned off at night.



Bigger Size, More Wonderful Visual Enjoyment

Screen size: 72"-150"



Panoramic View

Multiple people share a 160° HD view, no matter where they sit. Enjoy the same clear, gorgeous 4K HD picture.



Black Housing
Classic works



White Housing
Pure fashion

PRODUCT DETAILS

Tension Bracket
The screen is designed with pull wire to stretch the screen surface to make the screen flat and prevent curling and wrinkle.

Tension Bracket
Strong support screen

Electric Ground Lift
Save height and effort

Rotatable Fixed Base
Stronger wire raster

S Electric-Tension Floor Screen SPEC
White-Cinema

Aspect Ratio	Diag Size (inch)	Standard View Area		Overall Case Length (Including base and feet)		Overall Case Height		Screen Back Depth (With housing)	Packing Dimension (mm)	G.W	N.W
		W	H	L1	L2	H1	H2				
16:9	72"	1984	1096	1754	1660	1362	250	2030x240x1200	24.00	23.00	
	84"	2062	1164	1842	1697	1406	300	2100x240x1200	26.00	24.00	
	92"	2224	1244	1994	1801	1505	360	2200x240x1200	26.00	25.00	
	100"	2324	1314	2094	1907	1605	360	2300x240x1200	28.00	27.00	
	110"	2462	1378	2228	2028	1746	360	2400x240x1200	30.00	29.00	
4:3	120"	2024	1514	1896	1976	1605	360	2100x240x1200	28.00	27.00	
	130"	2162	1578	2028	2108	1846	360	2200x240x1200	30.00	29.00	
	140"	2304	1644	2148	2228	1986	360	2300x240x1200	32.00	31.00	
	150"	2462	1710	2278	2358	2146	360	2400x240x1200	34.00	33.00	
	160"	2624	1776	2408	2488	2306	360	2500x240x1200	36.00	35.00	



All WHITE DESIGN
Environmentally Friendly
Free Projection Ratio

Normally Black Border Design
Standard Ratio



Black Housing
Classic works

White Housing
Pure fashion

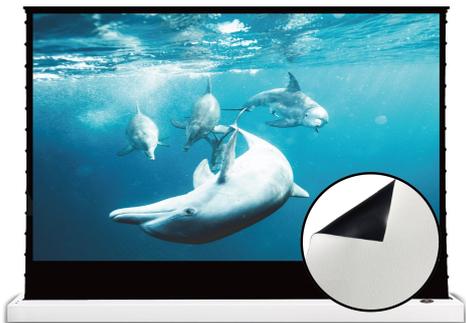

3D View More Wonderful
The screen supports the projection of 3D images, making the family view more wonderful.

White Housing
Pure fashion

S Electric-Tension Floor Screen SPEC
White-Cinema

Aspect Ratio	Diag Size (inch)	Standard View Area		Overall Case Length (Including base and feet)		Overall Case Height		Screen Back Depth (With housing)	Packing Dimension (mm)	G.W	N.W
		W	H	L1	L2	H1	H2				
16:9	72"	1984	1096	1754	1660	1362	250	2030x240x1200	24.00	23.00	
	84"	2062	1164	1842	1697	1406	300	2100x240x1200	26.00	24.00	
	92"	2224	1244	1994	1801	1505	360	2200x240x1200	26.00	25.00	
	100"	2324	1314	2094	1907	1605	360	2300x240x1200	28.00	27.00	
	110"	2462	1378	2228	2028	1746	360	2400x240x1200	30.00	29.00	
4:3	120"	2024	1514	1896	1976	1605	360	2100x240x1200	28.00	27.00	
	130"	2162	1578	2028	2108	1846	360	2200x240x1200	30.00	29.00	
	140"	2304	1644	2148	2228	1986	360	2300x240x1200	32.00	31.00	
	150"	2462	1710	2278	2358	2146	360	2400x240x1200	34.00	33.00	
	160"	2624	1776	2408	2488	2306	360	2500x240x1200	36.00	35.00	



VIVIDSTORM
S 電動地升白幕
一鍵開啟你的次世代影院

全新的觀影體驗

- 智慧屏保 遠端控制
- 無線遙控 遠端控制
- 智慧屏保 遠端控制
- 智慧屏保 遠端控制
- 智慧屏保 遠端控制
- 智慧屏保 遠端控制

無中“升”有
一鍵開啟
可收納隱藏的巨幕

免打孔設計 折箱插電即用
你不需要在牆上或地板上打孔來安裝屏幕，但確保幕布放在一個牢固的平臺。




精彩的3D效果
在家也能享受影院級3D影像



4K高清視覺盛宴
屏幕支持4K投影(主要以投影機畫質為量為主)
畅享高清視覺盛宴



黑色機箱
靜音白幕

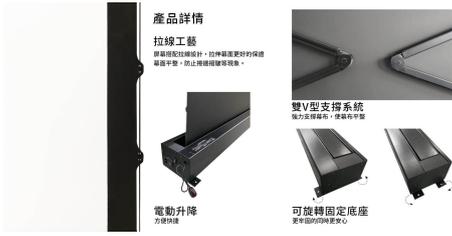

產品詳情

拉線工藝
線幕配合拉線設計，拉線幕更堅韌的保護
幕面平整，防止幕面皺褶等現象。



雙V型支撐系統

強力支撐幕布，使幕布在安裝
後可隨時調整幕面。



電動升降

方便升降



可旋轉固定底座

幕面可隨時調整角度。

幕面尺寸(英寸) 幕面尺寸(厘米) 幕面尺寸(英寸) 幕面尺寸(厘米) 幕面尺寸(英寸) 幕面尺寸(厘米) 幕面尺寸(英寸) 幕面尺寸(厘米)


幕面尺寸	W	H	L1	L2	Z	X	Y	重量
72"	1584	864	1734	1095	1200	300	1200x260x220	24.00
84"	1848	1008	2034	1260	1400	300	1200x260x220	26.00
96"	2112	1152	2334	1425	1600	300	1200x260x220	28.00
108"	2376	1296	2634	1590	1800	300	1200x260x220	30.00
120"	2640	1440	2934	1755	2000	300	1200x260x220	32.00
132"	2904	1584	3234	1920	2200	300	1200x260x220	34.00
144"	3168	1728	3534	2085	2400	300	1200x260x220	36.00
156"	3432	1872	3834	2250	2600	300	1200x260x220	38.00
168"	3696	2016	4134	2415	2800	300	1200x260x220	40.00



幕平如鏡

幕面採用拉線設計，完美的呈現原始畫面，幕面無褶皺。

Aspect Ratio	Diag. Size (inch)	Standard View Area		Overall Case Length including space occupied by stand and wire			Upper cover size	Overall Height	Packing Dimension mm	G.W Kgs	N.W Kgs
		W	H	L1	L2	Z					
16:9	160"	3542	1992	3849	3652	2500	3949x260x220	50.00	40.00		
16:9	170"	3763	2116	4070	3960	2600	4170x260x220	55.00	45.00		
16:9	180"	3985	2241	4300	4100	2800	4300x260x220	59.00	49.00		
16:9	200"	4428	2490	4700	4540	2900	4800x260x220	63.00	53.00		

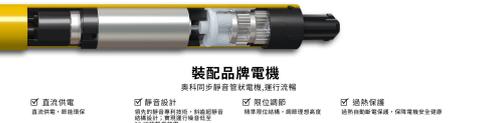

裝配品牌電機

奧科同步靜音管狀電機，運行流暢

- ☑ 直流供電 最高效率，節能環保
- ☑ 靜音設計 採用同步靜音管狀電機，無碳刷靜音，運行流暢，壽命長，運行無聲。
- ☑ 穩位調節 精確定位，無誤差。
- ☑ 絕熱保護 採用絕熱材料，保障電機安全運行。


VIVIDSTORM S-WC 常規/長焦 電動地升幕 白幕/黑邊/黑色機箱 (16:9)

- 劇院PVC白幕布材質
- 在弱光環境下表現出色- 建議投影機具有1800ANSI以下的真實流明-推薦用於普通/標準/長焦投影機使用
- 電動升降-收放自如，不佔空間
- 雙彈簧V型支架系統，幕面緊繃平直
- 1.1增益，160°可視角度不挑角度，兼容3D/4K/8K高清視覺盛宴
- 4種控制方式實現上下約20-30秒！無線遙控
- 即插即用，快速安裝，無需鑽孔安裝，節省空間的設計
- 72吋-200吋可選擇 (因尺寸及重量限制，超過120吋只能送貨到樓下；72吋至120吋需要客人確認樓宇電梯能放入投影幕，及運送到指定樓層，才能安排送貨上門)
- 品牌靜音管狀電機

支援常規/長焦投影機，白幕布，支援4K投影效果，高對比度，高度還完色彩，一鍵升降，帶遙控

(如需白色機箱款，或需要135吋以上，請聯絡本店查詢 3188 4814)

VIVIDSTORM 所有專業投影幕一覽表

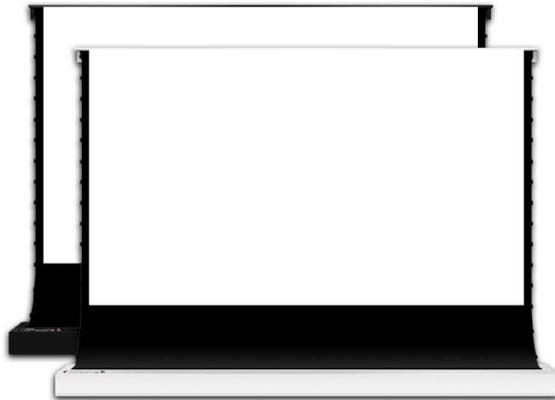


VIVIDSTORM
S 電動地升白幕
一鍵開啟你的次世代影院



Black Housing

Classic works

黑色機箱-常規黑邊款

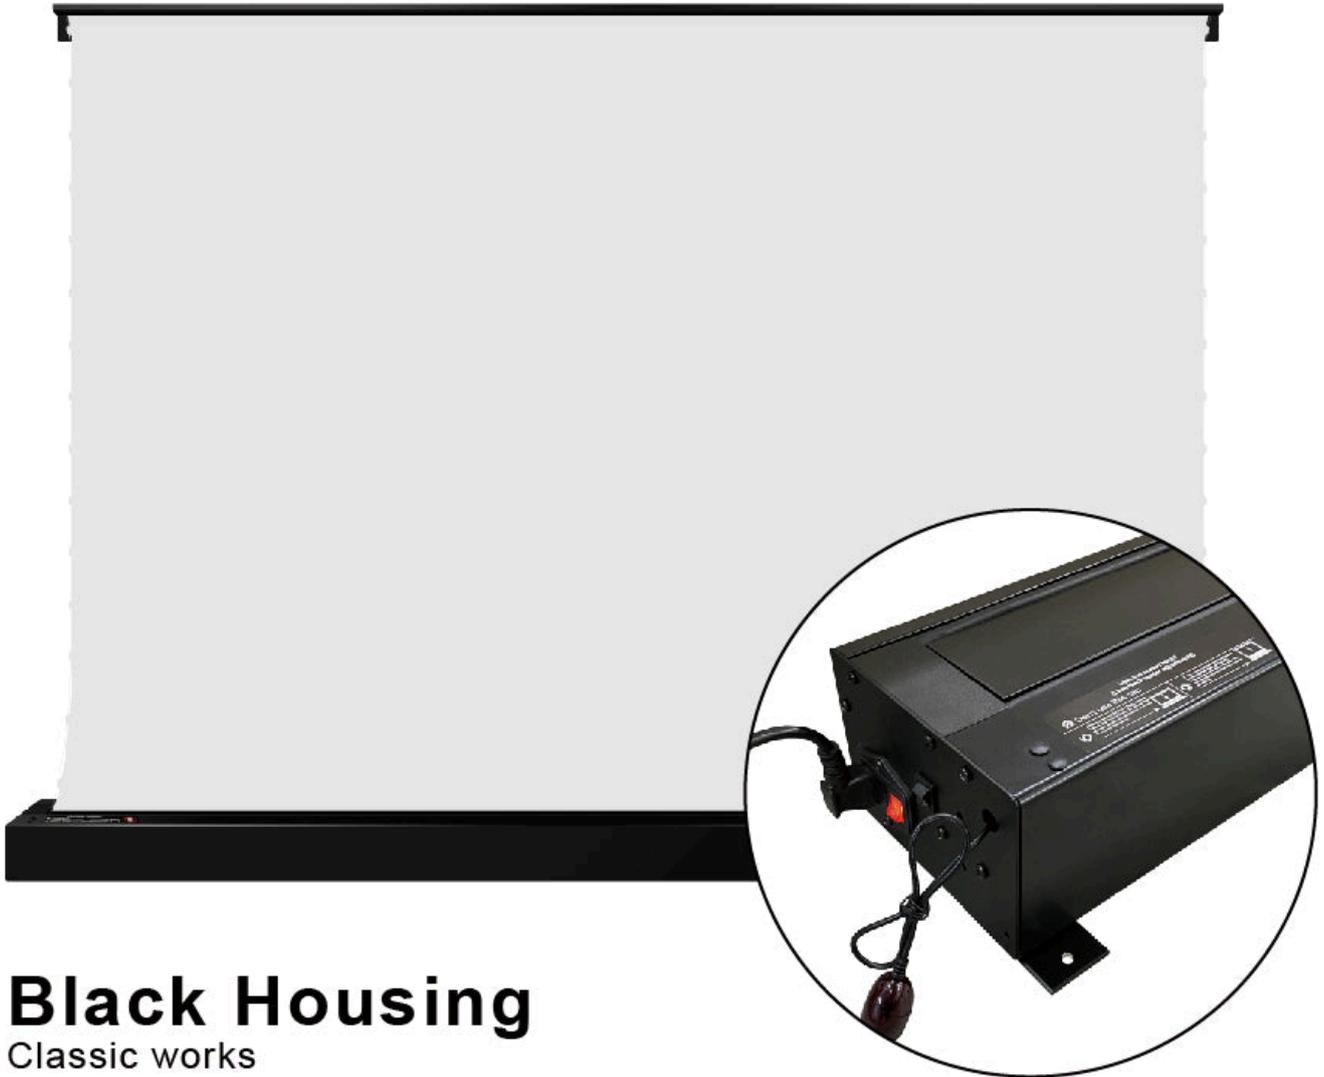

Black Housing

Classic works


黑色機箱-幕布全白款



White Housing

Pure fashion

白色機箱-常規黑邊款

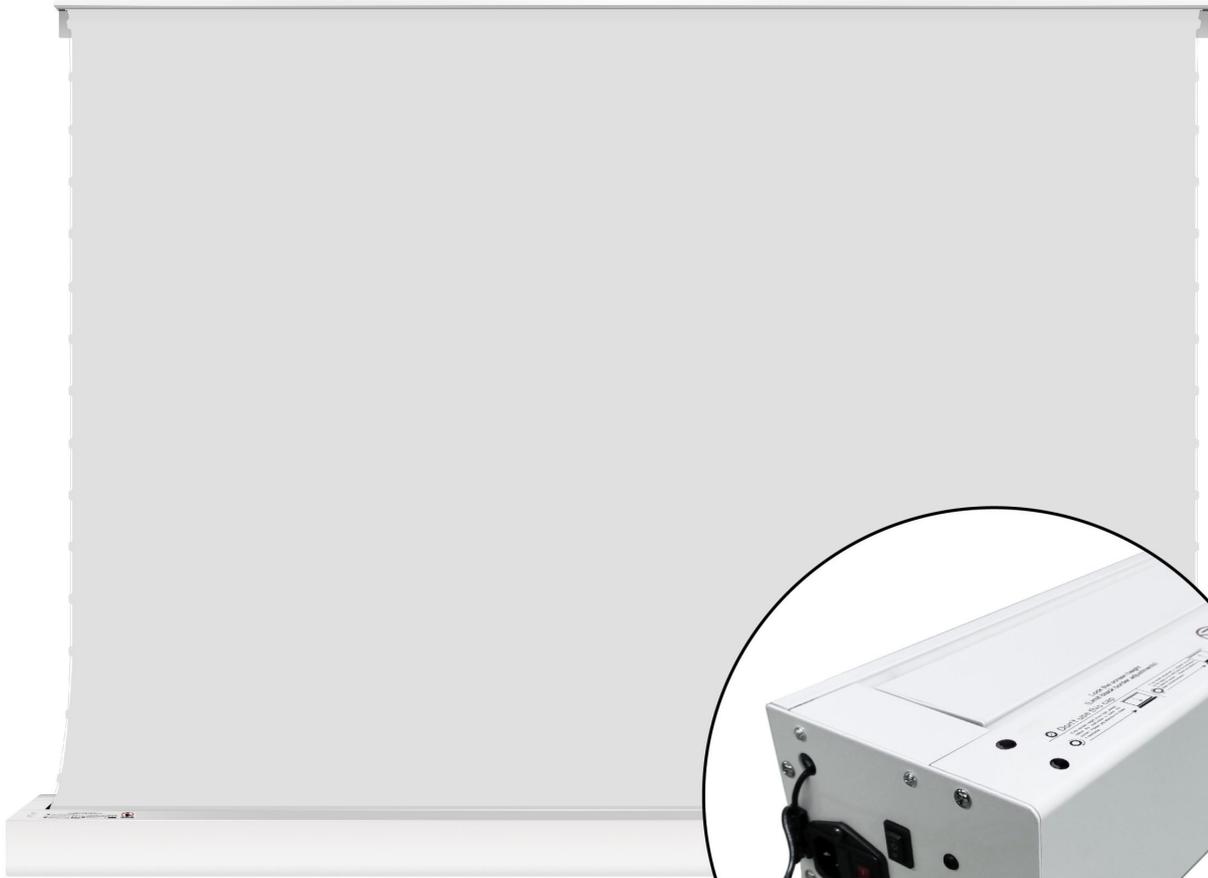

White Housing


Pure fashion

白色機箱-幕布全白款


更大的屏幕，更大的尺寸

屏幕尺寸：72"- 150"

根據空間大小/個人喜好
選擇合適的屏幕尺寸，
讓觀看更舒適。

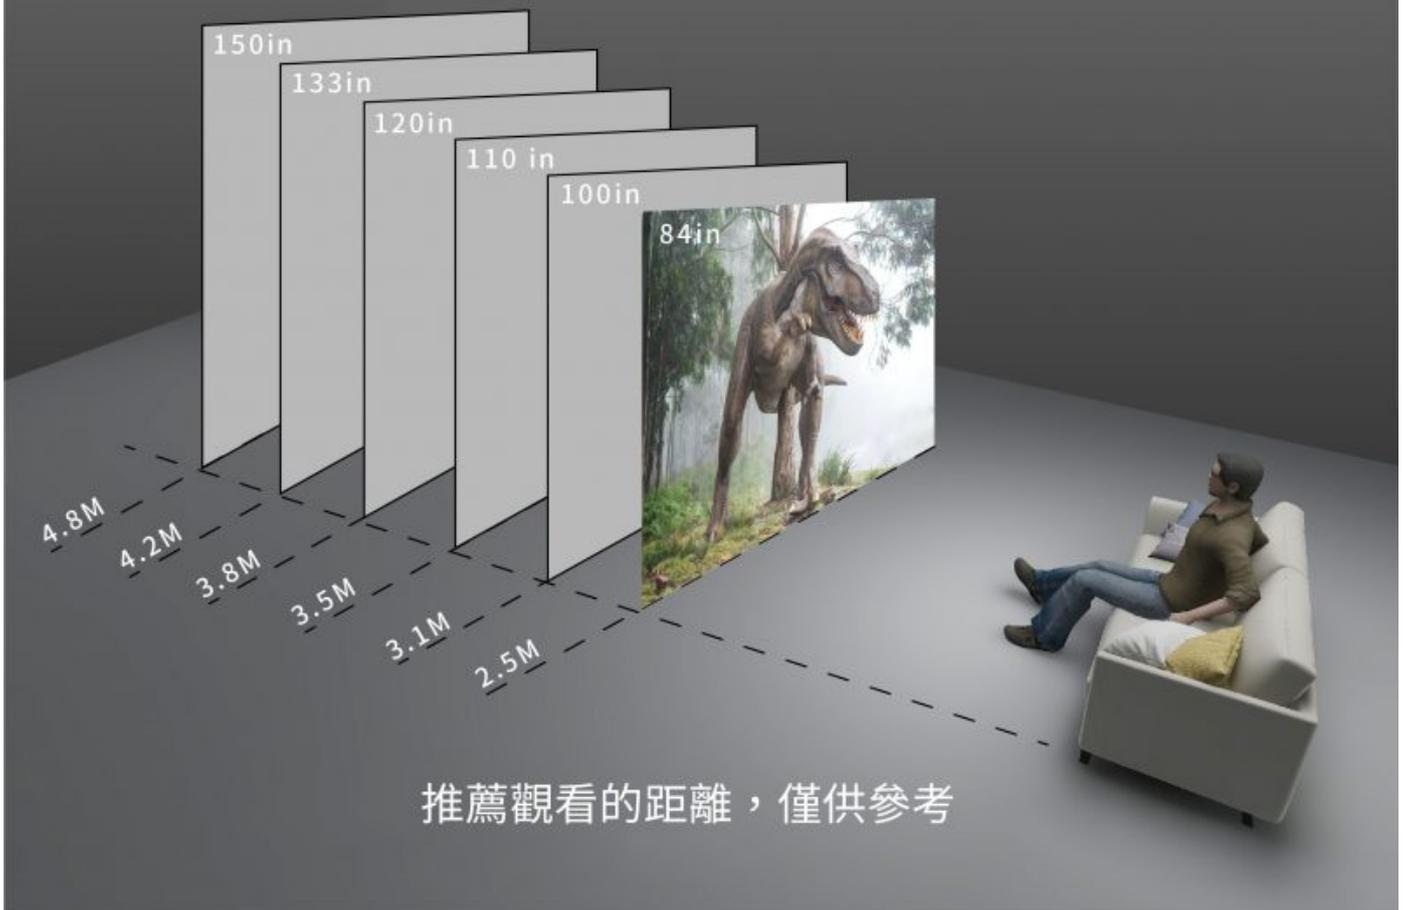


推薦觀看距離：至少2.5米

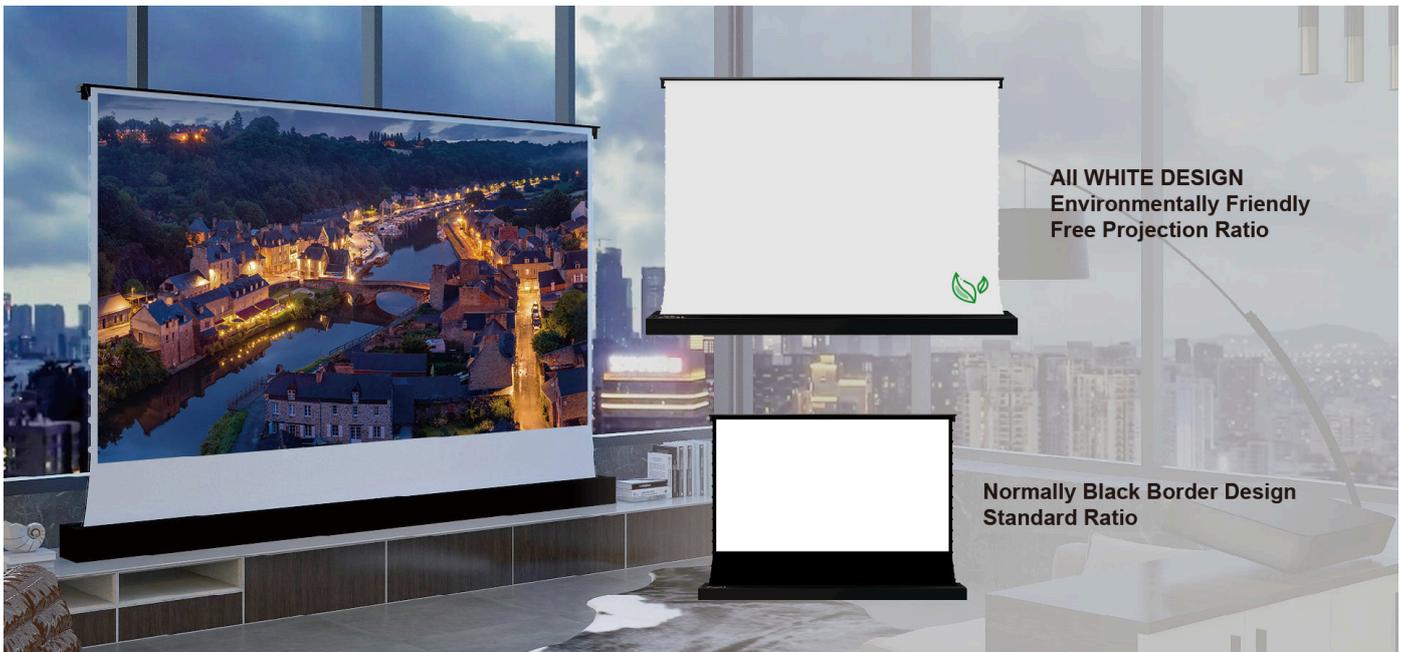

All WHITE DESIGN
Environmentally Friendly
Free Projection Ratio



Normally Black Border Design
Standard Ratio

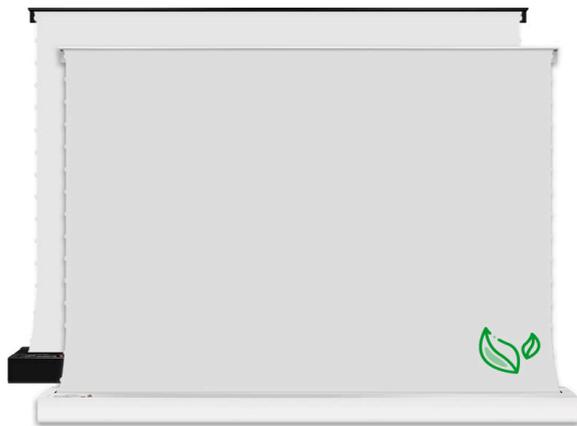

S Electric Tab-Tension Floor Screen
HD White Cinema

**A More Modern Way
To Open The Screen**



全新的觀影體驗



電動升降
收放自如



無線遙控
遠程控制



160°視角
全方位顯示



護眼技術
呵護視力健康



72吋-150吋
更多尺寸選擇



品牌電機
靜音驅動

無中“升”有

一鍵開啟
可收納隱藏的巨幕



屏幕打開




屏幕关上



免打孔設計 拆箱插電即用

你不需要在牆上或地板上打孔來安裝屏幕
但要確保它放在一個平坦的平面

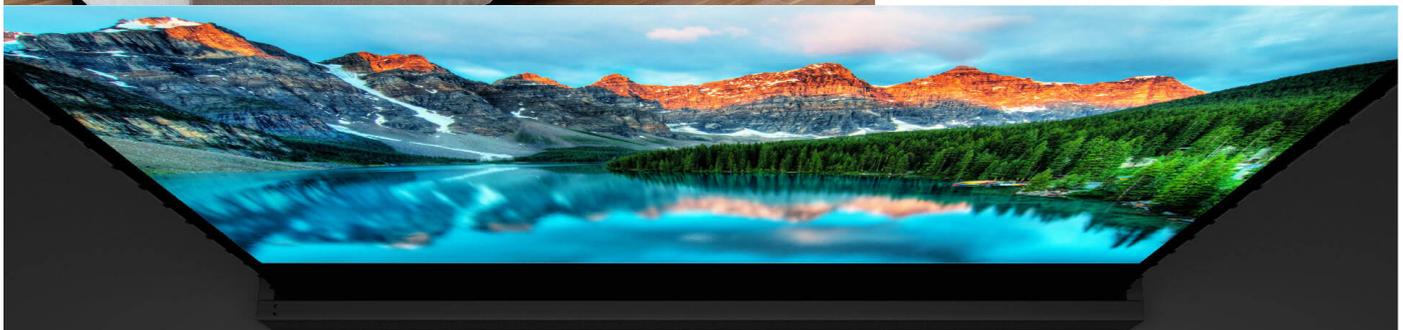


幕平如鏡

幕面採用拉線設計，完美的呈現原始畫面，幕面無曲線波紋。



五光徘徊，十色陸離

高清白幕在夜晚關燈環境下觀影能達到最佳效果

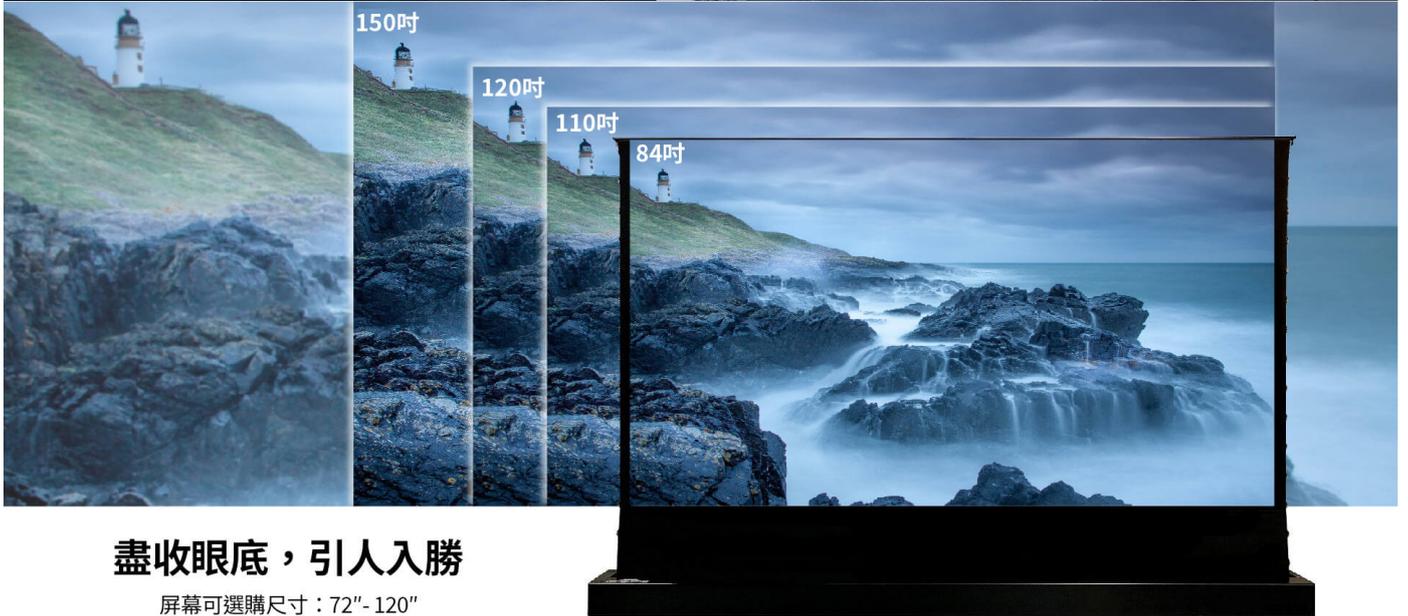

盡收眼底，引人入勝

屏幕可選購尺寸：72"-120"



裝配品牌電機


奧科同步靜音管狀電機,運行流暢

直流供電
直流供電，節能環保

靜音設計
領先的靜音專利技術，斜齒超靜音結構設計；實現運行噪音低至30dB的靜音效果

限位調節
精準限位結構，調節理想高度

過熱保護
過熱自動斷電保護，保障電機安全健康

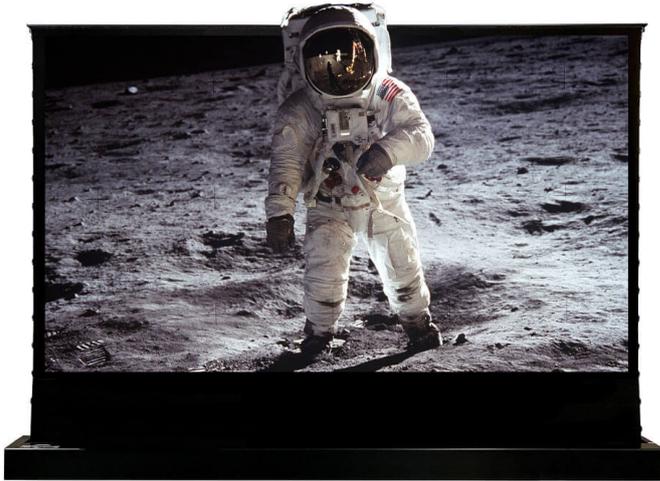


精彩的3D效果

在家也能享受影院級3D影像


4K高清視覺盛宴

屏幕支持4K投影(主要以投影機畫面質量為主)
暢享高清視覺盛宴

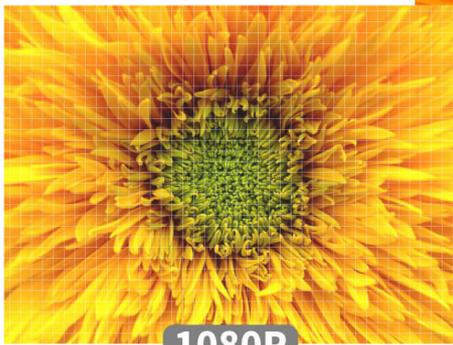


皆“大”歡喜

全家總動員，聚會無限制，160度無死角，全景大視角。

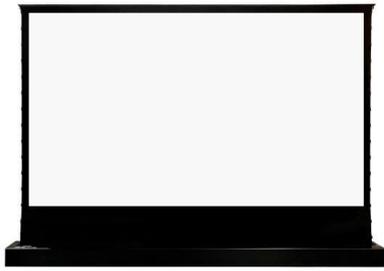

黑色機箱
經典百搭

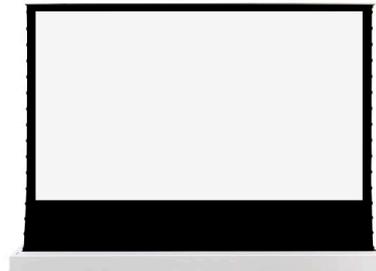

White Housing
Pure fashion



產品詳情

拉線工藝

屏幕搭配拉線設計，拉伸幕面更好的保證幕面平整，防止捲邊褶皺等現象。




雙V型支撐系統
強力支撐幕布，使幕布平整




電動升降
方便快捷




可旋轉固定底座
更牢固的同時更安心

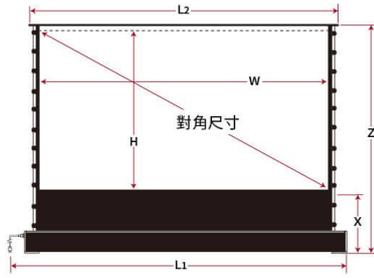

屏幕主視圖(實際投影面積在虛線內)



機箱側視圖



機箱側視圖(頂蓋尺寸)

S 電動地升幕 -白幕-										
投影區 比例	投影面積 對角尺寸	投影面積尺寸		總長度 (含電線占用空間)	頂蓋長度	屏幕總高度	黑布至底 (包括機箱)	包裝尺寸	毛重	淨重
	(inch)	W	H	L1	L2	Z	X	mm	Kgs	Kgs
16:9	72"	1594	896	1734	1660	1206	250	1930×240×210	24.00	23.00
	84"	1860	1046	2141	1905	1456	350	2180×240×210	25.00	24.00
	92"	2037	1145	2317	2081	1555	350	2330×240×210	26.00	25.00
	100"	2214	1245	2495	2276	1655	350	2530×240×210	28.00	27.00
	110"	2435	1370	2720	2528	1780	350	2770×240×210	31.00	30.00
	120"	2656	1494	2940	2734	1904	350	3000×240×210	33.00	32.00
	135"	2989	1680	3357	3185	2060	350	3380×240×210	37.00	36.00
	150"	3321	1867	3600	3425	2277	350	3680×240×210	39.00	38.00

*單位(mm), 手工制作, 可能會有1-1.5mm的偏差。




Aspect Ratio	Diag.Size	Standard View Area		Overall Case Length including space occupied by plug and wire	Upper cover size	Overall Height	Packing Dimension	G.W	N.W
	(inch)	W	H	L1	L2	Z	mm	Kgs	Kgs
16:9	160"	3542	1992	3849	3652	2500	3949×260×220	50.00	40.00
16:9	170"	3763	2116	4070	3960	2600	4170×260×220	55.00	45.00
16:9	180"	3985	2241	4300	4100	2800	4300×260×220	59.00	49.00
16:9	200"	4428	2490	4700	4540	2900	4800×260×220	63.00	53.00

*單位(mm), 手工制作, 可能會有1-1.5mm偏差。

! 溫馨提示，如介意以下情況請慎拍!!

1、屏幕表面能看到少許黑點、白點、污點等雜質，根據檢測方法檢測合格，則在產品合格範圍內。

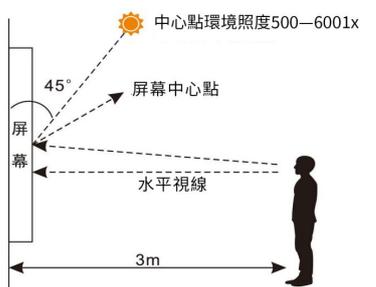



- (1) 白幕面為投影機影像的反射面（從幕面上方向下觀測為黑色面，從下方向上觀測為白色面），是觀賞影像的主功能面，故列為品質標準。白面無超出品質規格即符合出廠合格標準。
- (2) 黑面為吸收室內環境光的功能面，與影像觀賞品質無直接相關，其品質規格與白面不同。反映的輕微黑色痕跡屬於工業製成商品生產過程中不可避免的外觀現象，符合出廠合格標準。

總結：抗光投影銀幕產品黑面所見的輕微黑色痕跡以及白點等為正常的產品外觀現象，絕對不會影響影像觀賞品質，請客戶安心使用。


檢測方法：

- ① 將屏幕升起貼近牆面，觀測者直立站於距離屏幕3m遠的距離；
- ② 觀測者須在正常光照環境下（照度500—600lx）進行觀察；
- ③ 觀測者與屏幕正面距離3m觀察，且屏幕中心點須貼齊或高於水平視線（如圖1），並於中心點、向左位移1m、向右位移1m做觀察（如圖2）。


檢測結果在容許度範圍內則屬合格產品。

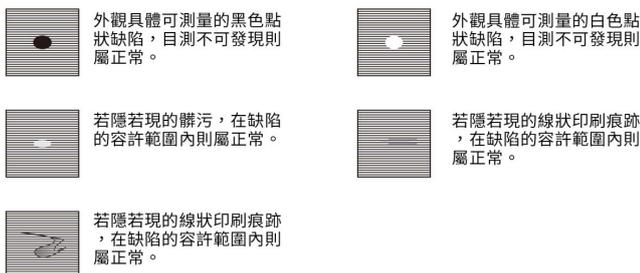

2、屏幕在打開後，幕面上出現有一道道規律的淺顯摺痕，這是由於幕布長時間處於捲曲收緊狀態引起的，屬於正常現象，不影響觀影。將幕布打開，經過一段時間後，幕布上的條紋會逐漸消失。

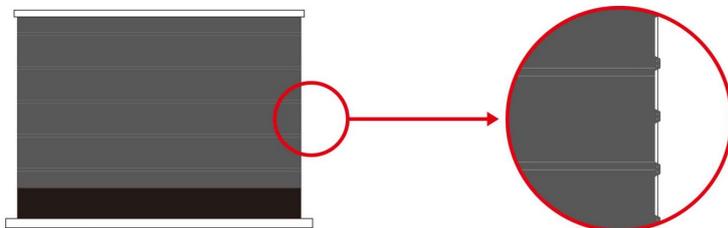

3. 放置設備時，請確保設備始終保持水平狀態，不可將幕布傾斜或者垂直放置；
4. 屏幕在使用一段時間後，屏幕上方兩端蓋子稍微翹起屬於正常現象，不影響觀影。由於蓋子翹起，導致屏幕關閉後與罩殼有縫隙，也屬於正常現象

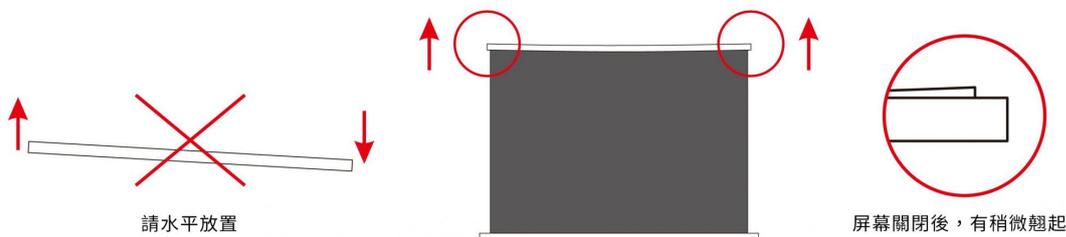



無線RF射頻遙控
全新遙控器，輕鬆控制畫面。



額外紅外遙控器，及紅外接收器
投影幕插上紅外遙控器，紅外遙控器就能正常工作。



電源線
屏幕供電，可拆卸電源線，方便收納。



調整桿
插入投影幕的調整孔，調整屏幕的固定高度。



Gift, No Warranty

投影幕升降無線觸發器(贈品)
插在投影機USB接口，待投影機開關電源時，自動觸發投影幕的升降。


[Read More](#)

SKU: S-VIVIDSTORM-ES-S-TENSION-WC-72-120

Price: \$5400 – \$21088

分類: [電動地升幕](#)



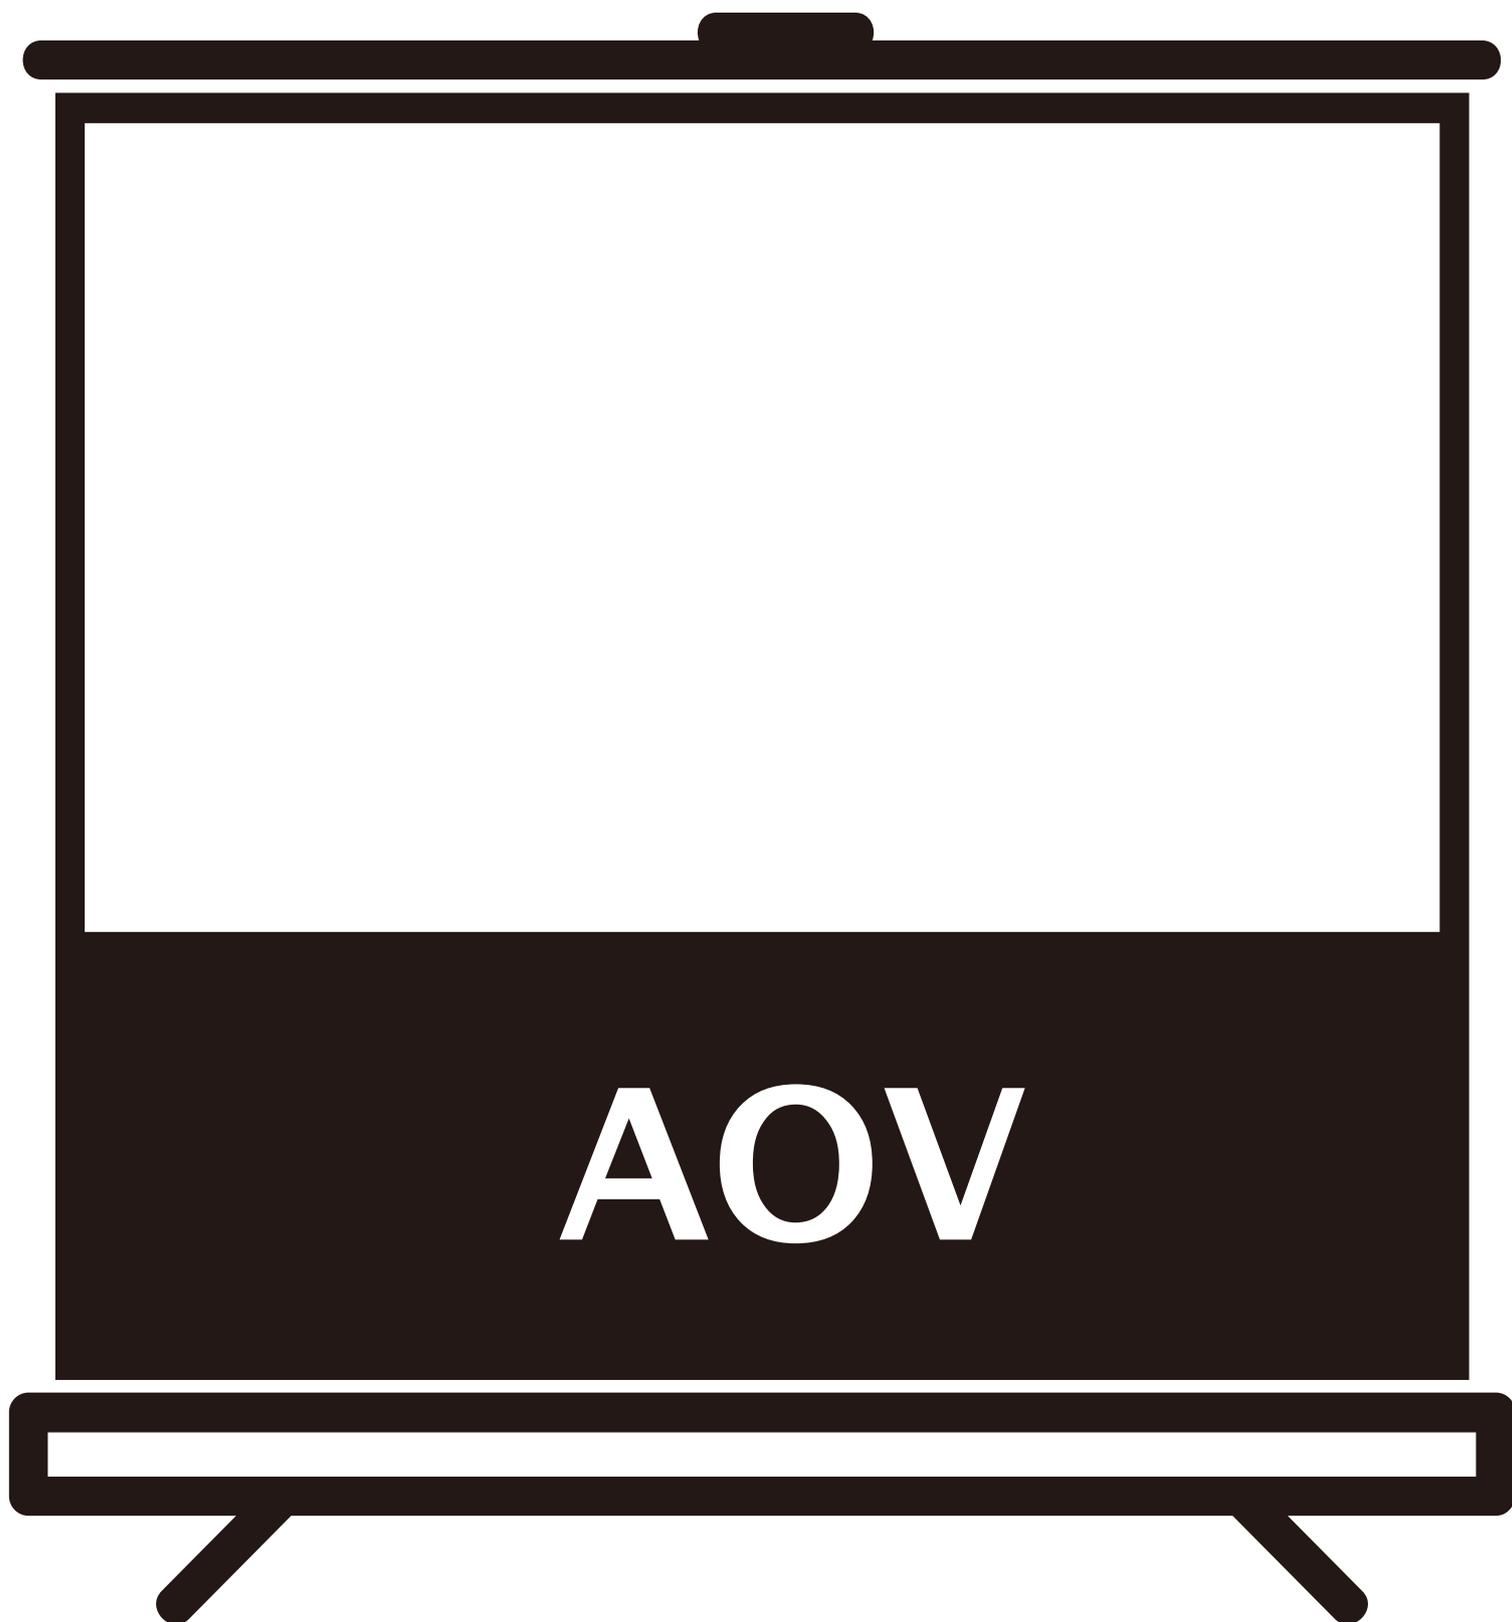

快速折疊幕



AOV 4:3 快速折疊幕 多尺寸選擇 (QUICK FOLDING SCREEN)

長寬比：4:3

採用固定結構方式的銀幕。正投選用軟白幕，進口投幕布，畫質一流，紋理細膩，質地光潔柔滑，平整不變形，有良好的抗褶皺能力，配有攜帶式航空箱，方便移動無須安裝直接使用，特別適合辦公室、會議廳作簡報使用，應用範圍廣泛。

快速折疊幕



比例	規格	型號	投影面積		外罩尺寸	航空箱包裝尺寸	重量 (kg)
			W(mm)	H(mm)	LxDxH(mm)	LxDxH(mm)	
4:3	100"	FF100X	2032	1524	2184x1676x80	1260x410x440	46
	120"	FF120X	2438	1828	2590x1980x80	1460x410x440	50
	150"	FF150X	3200	2438	3200x2438x80	1500x410x470	55
	180"	FF180X	3660	2740	3810x2895x80	1630x410x470	60
	200"	FF200X	4064	3048	4216x3200x80	1780x410x470	64
	250"	FF250X	5080	3810	5272x3986x100	1530x570x620	80
	300"	FF300X	6100	4570	6305x4735x100	1690x570x620	90
	400"	FF400X	8128	6096	8365x6295x100	1930x570x620	110

快速折疊幕



比例

4:3

規格	100"	
型號	FF100X	
投影面積	W(mm)	2032
	H(mm)	1524
外罩尺寸	LxDxH(mm)	2184x1676x80
包裝尺寸	LxDxH(mm)	1260x410x440
重量	(kg)	46

規格	120"
型號	FF120X
投影面積	W(mm) 2438
	H(mm) 1828
外罩尺寸 LxDxH(mm)	2590x1980x80
包裝尺寸 LxDxH(mm)	1460x410x440
重量 (kg)	50
規格	150"
型號	FF150X
投影面積	W(mm) 3200
	H(mm) 2438
外罩尺寸 LxDxH(mm)	3200x2438x80
包裝尺寸 LxDxH(mm)	1500x410x470
重量 (kg)	55
規格	180"
型號	FF180X
投影面積	W(mm) 3660
	H(mm) 2740
外罩尺寸 LxDxH(mm)	3810x2895x80
包裝尺寸 LxDxH(mm)	1630x410x470
重量 (kg)	60
規格	200"
型號	FF200X
投影面積	W(mm) 4064
	H(mm) 3048
外罩尺寸 LxDxH(mm)	4216x3200x80
包裝尺寸 LxDxH(mm)	1780x410x470
重量 (kg)	64
規格	250"
型號	FF250X
投影面積	W(mm) 5080
	H(mm) 3810
外罩尺寸 LxDxH(mm)	5272x3986x100
包裝尺寸 LxDxH(mm)	1530x570x620
重量 (kg)	80
規格	300"
型號	FF300X
投影面積	W(mm) 6100
	H(mm) 4570
外罩尺寸 LxDxH(mm)	6305x4735x100

包裝尺寸 LxDxH(mm)	1690x570x620
重量 (kg)	90
規格	400"
型號	FF400X
投影面積	W(mm) 8128
	H(mm) 6096
外罩尺寸 LxDxH(mm)	8365x6295x100
包裝尺寸 LxDxH(mm)	1930x570x620
重量 (kg)	110

[Read More](#)

SKU: S-AOV-FASTFOLD

Price: \$4180 – \$19980

分類: [快速折疊幕](#)



INDEX

A

AOV 4

- 3 快速折疊幕 多尺寸選擇 (Quick Folding Screen) 33

V

VIVIDSTORM S-ALR 常規/長焦 抗光灰幕 電動地升幕 黑色機箱 (16
- 9) 3

VIVIDSTORM S-WC 常規/長焦 電動地升幕 白幕/黑邊/黑色機箱 (16
- 9) 14