



# 投影產品專門店



## **TABLE OF CONTENTS**

抗光縣	黑柵幕											2
V	/IVIDST	ORM S	S-PRO #	超短焦	抗光黑	冊幕	電動地升幕	[黑色機	箱 (16:9)			2
\	/IVIDST	ORM S	S-PRO-I	P 超短魚	焦 透聲扌	汀孔:	抗光黑柵幕	電動地	升幕 黑色	色機箱	首 (16:9)	
												14
V	/IVIDST	ORM	Γ-PRO ‡	超短焦	抗光黑村	冊幕	電動降落幕	!黑色機	箱(16:9	)		. 27
\	/IVIDST	ORM	Γ-PRO-I	P 超短魚	嶣 透聲扌	汀孔:	抗光黑柵幕	電動降	落幕 黑色	色機箱	質 (16:9)	
												. 40


# 抗光黑柵幕



## 適合超短焦投影機 S PRO DESTROIT







#### ▲ Important Reminder



## Warm tips, if you mind the following conditions do not purchase!!!!!

When there are a few black spots, white spots, stains and other impurities on the screen surface, but if they are qualified according to the detection method, then such situation is not a product quality problem, and it is within the scope of product qualification.





- The detection method is as follows (1), Please raise the screen of this product and close to the wall, and the observer can observe the film at a distance of 3 meters away from the screen;
  (2). The observer needs to observe the shadow in the normal light environment (illumination 500-600k);
- (2,) I ne coserver neests to coserver the shoot on the normal ignit environment (ulumination 504-0000);

  (3) The distance between the observer and the front of the screen should be skip to a distance of 3 meters, ond the center point of the screen should be close to a higher than the horizontal line of sight (as shown in figure 1), and the observation should be made or the center point, in the left and if in to the right (as shown in figure 2), and the observation should be made or the center point, in the left and if in to the right (as shown in figure 2). As long as the test results of the product are within the allowable range, the product is qualified.












- II.The white screen is listed as the quality standard because it is not only the reflection surface of the projector image (the black surface is observed from the upper and lower direction, and the white surface is observed from the bottom derically, but do the ment increase arise of the verying image, so the is observed from the bottom derically, but do the hematine results or surface of the verying image, so the control of the project of the control of the project of the control of the control
- If there are regular creases on the screen surface after the screen is opened, don't worry. This is a normal phenomenon. It is caused by the screen being curled and tightened for a long time, which does not affect the user's viewing. After opening the screen for a period of time, you will notice that the stripes on the screen will gradually disappear.




















110inch

Screen size: 72"-120"

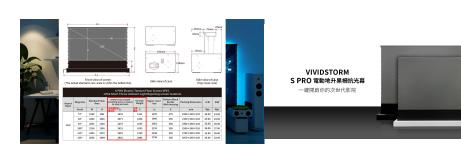





## VIVIDSTORM S-PRO 超短焦 抗光黑柵幕 電動地升幕 黑色機箱 (16:9)

- ●黑柵抗光幕(CBSP)幕布材質
- ●卓越的抗光效果-有效抑制上方光線對畫面的影響
- ●適合1800ANSI流明以上的超短焦鐳射投影機/鐳射電視
- ●電動升降-收放自如、雙彈簧支架系統
- ●0.6增益,170°視角,3D/4K/8K高清視覺盛宴
- ●4種控制方式實現上下約20-30秒!無線遙控
- ●即插即用,快速安裝,無需鑽孔安裝,節省空間的設計
- ●72寸-120寸可選擇
- ●品牌靜音管狀電機


#### (客人需要確認樓宇電梯能放入投影幕,及運送到指定樓層,才能安排送貨上門)

支援超短焦雷射投影機,極佳抗光效果,支援4K投影效果,高對比度,高度還完色彩,一鍵升降,帶遙控 (黑柵幕最大尺寸係120吋,另外如需白色機箱款,請聯絡本店查詢 3188 4814)

#### VIVIDSTORM 所有專業投影幕一覽表





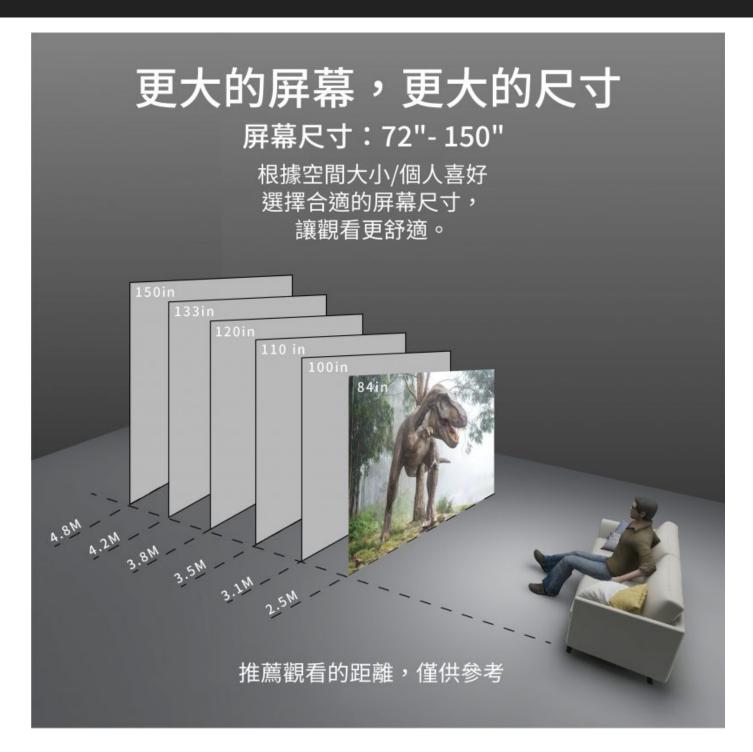

推薦觀看距離:至少2.5米



## 無中"升"有

一鍵開啟 可收納隠藏的巨幕












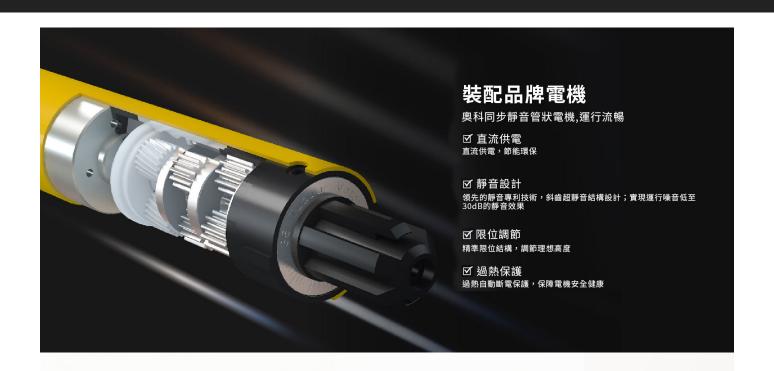

## 更大的屏幕 更大的視覺享受

告別小屏幕時代,選擇大屏幕,讓視覺享受更 大的衝擊感。

60吋液晶高清電視



### 120吋VIVIDSTORM電動地升幕





盡收眼底,引人入勝

屏幕可選購尺寸:72"-120"





產品詳細信息



拉線工藝 屏幕搭配拉線設計,拉伸幕面更好的保證 幕面平整,防止捲邊褶皺等現象。




雙V型支撐系統 強力支撐幕布,使幕布平整






可旋轉固定底座

增大與地面的接觸面積,更牢固的同時更安心(底座帶 有孔位,可打固定螺絲)

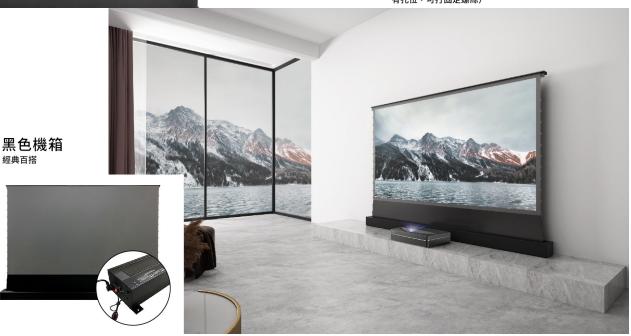



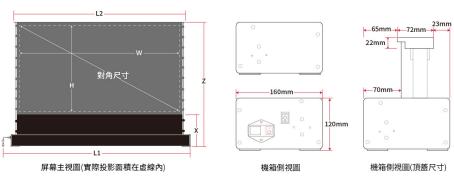

S PRO 電動地升幕 -超短焦黑柵抗光幕-											
投影區 比例	投影面積 對角尺寸			總長度 (含電線占用空間)	頂蓋長度	屏幕總高度	黒布至底 (包括機箱)	包裝尺寸	毛重	净重	
	英寸	w	Н	Lı	L2	z	х	mm	Kgs	Kgs	
	72"	1594	896	1831	1670	1211	270	1900×240×210	24.00	23.00	
	84"	1860	1046	2077	1905	1436	350	2150×240×210	25.00	24.00	
16:9	92"	2037	1145	2257	2081	1535	350	2300×240×210	26.00	25.00	
10.3	100"	2214	1245	2431	2276	1635	350	2500×240×210	28.00	27.00	
	110"	2435	1370	2687	2528	1760	350	2740×240×210	31.00	30.00	
	120"	2656	1494	2910	2730	1884	350	2970×240×210	33.00	32.00	







## Important Reminder

Due to the large size of the anti light curtain, please measure the elevator and corridor of your home before purchase. For the moment, only elevator direct delivery is supported, not corridor delivery. If the elevator cannot reach the destination, the delivery will be delivered to the downstairs, and you can arrange the transportation by yourself. You can negotiate with the express delivery or handle the extra stair handling costs (please contact customer service for details).





## 溫馨提示,如介意以下情況請慎拍!!

1、屏幕表面能看到少許黑點、白點、污點等雜質,根據檢測方法檢測合格,則在產品合格範圍內。






圖1 側視圖


- (1) 白幕面為投影機影像的反射面(從幕面上方向下觀測為黑色面,從下方向上觀 測為白色面),是觀賞影像的主功能面,故列為品質標準。白面無超出品質規 格即符合出廠合格標準。
- (2) 黑面為吸收室內環境光的功能面,與影像觀賞品質無直接相關,其品質規格與 白面不同。反映的輕微黑色痕跡屬於工業製成商品生產過程中不可避免的外觀 現象,符合出廠合格標準。
- 總結:抗光投影銀幕產品黑面所見的輕微黑色痕跡以及白點等為正常的產品外觀現象 ,絕對不会影响影像觀賞品質,請客户安心使用。


#### 檢測方法:

- ①將屏幕升起貼近牆面,觀測者直立站於距離屏幕3m遠的距離;
- ②觀測者須在正常光照環境下(照度500-600lx)進行觀察;
- ③觀測者與屏幕正面距離3m觀察,且屏幕中心點須貼齊或高於水平視線 (如圖1),並於中心點、向左位移1m、向右位移1m做觀察(如圖2) 檢測結果在容許度範圍內則屬合格產品。













外觀具體可測量的白色點 狀缺陷,目測不可發現則 屬正常。




若隱若現的線狀印刷痕跡 ,在缺陷的容許範圍內則



2、屏幕在打開後,幕面上出現有一道道規律的淺顯摺痕,這是由於幕布長時間處於捲曲收緊狀態引 起的,屬於正常現象,不影響觀影。將幕布打開,經過一段時間後,幕布上的條紋會逐漸消失。

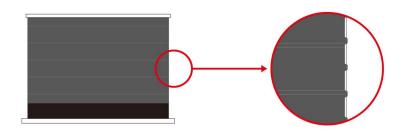

- 3. 放置設備時,請確保設備始終保持水平狀態,不可將幕布傾斜或者垂直放置;
- 4. 屏幕在使用一段時間後,屏幕上方兩端蓋子稍微翹起屬於正常現象,不影響觀影。由於蓋子翹起,導致屏 幕關閉後與罩殼有縫隙,也屬於正常現象

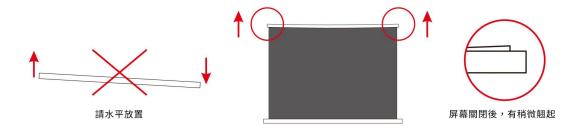



無線RF射頻遙控

全新遙控器,輕鬆控制畫面。



額外紅外遙控器,及紅外接收器

投影幕插上紅外遙控器,紅外 遙控器就能正常工作。



電源線

屏幕供電,可拆卸電源線, 方便收納。



調整桿

插入投影幕的調整孔,調整屏幕的固定高度。



投影幕升降無線觸發器(贈品)

插在投影機USB接口,待投影機開關電源時,自動觸發投影幕的升降。

#### **Read More**


**SKU:** S-VIVIDSTORM-ES-SPRO-TENSION-72-120

Price: \$9400 - \$13000 分類: 電動地升幕







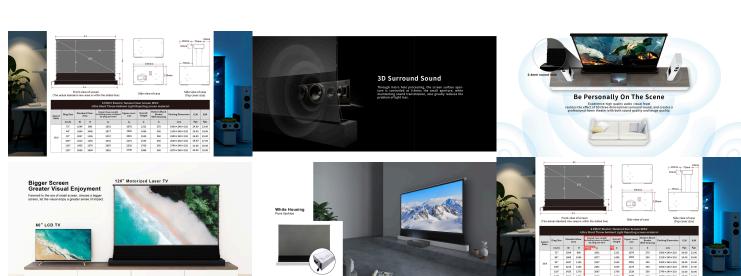

# VIVIDSTORM S-PRO-P 超短焦 透聲打孔 抗光黑柵幕 電動地升幕 黑色機箱 (16:9)

- ●黑柵抗光幕(CBSP)幕布材質-【底部黑邊打孔設計:屏幕底部黑邊採用0.4mm穿孔聲孔設計,專為音響必須要放置在幕布後方設計;如音箱不是放置在幕布後,則無須購買打孔設計】
- ●卓越的抗光效果-有效抑制上方光線對畫面的影響
- ●適合1800ANSI流明以上的超短焦鐳射投影機/鐳射電視
- ●電動升降-收放自如,不佔空間
- ●雙彈簧V型支架系統,幕面緊繃平直
- ●0.6增益,170°可視角度不挑角度,兼容3D/4K/8K高清視覺盛宴
- ●多種控制方式實現上下約20-30秒!無線遙控
- ●即插即用,快速安裝,無需鑽孔安裝,節省空間的設計
- ●72寸-120寸可選擇
- ●品牌靜音管狀電機

#### (客人需要確認樓宇電梯能放入投影幕,及運送到指定樓層,才能安排送貨上門)

支援超短焦雷射投影機,極佳抗光效果,透聲打孔,支援4K投影效果,高對比度,高度還完色彩,一鍵升降,帶遙控 (黑柵幕最大尺寸係120吋,另外如需白色機箱款,請聯絡本店查詢 3188 4814)

#### VIVIDSTORM 所有專業投影幕一覽表







推薦觀看距離: 至少2.5米



## A Projection Screen That Rises From The Ground

Be triggered at any moment
Open your home theater in 30 seconds
The screen, which rises from the ground, is not only
convenient for activities, but also does not need to be
installed through holes in the wall










## Be Personally On The Scene

Experience high quality audio visual feast realizes the effect of 3D three-dimensional surround sound, and creates a professional home theater with both sound quality and image quality.





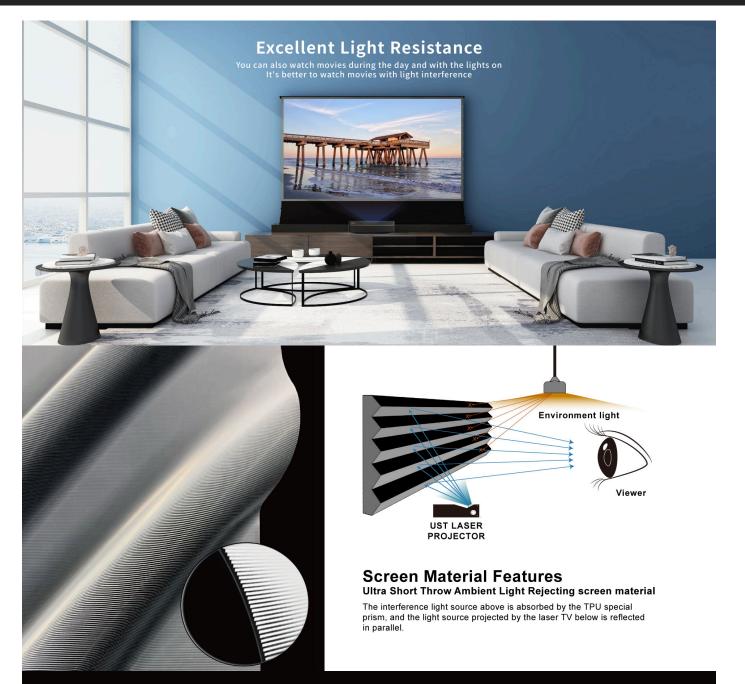

## **Blocked Light Sources**




Light from the left / right / bottom of the screen affects the projection



It mainly blocks the light above the screen



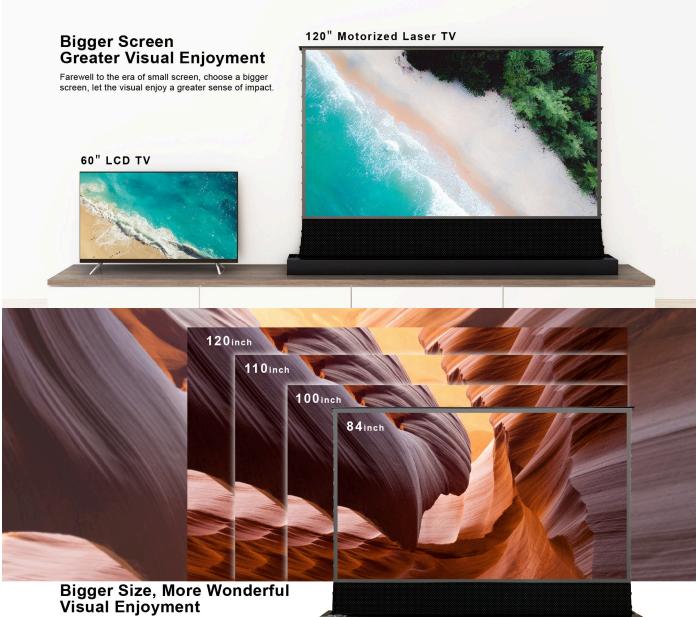

Screen size: 72"-120"











·Wireless RF Remote Control

The new remote controls, easy to control the screen.



·Adjust Rod

Adjust the fixed height of the screen.



•Extra IR Remote Control With IR Receiver The IR remote control required line-of-sight to the IR sensor, The IR receiber has been connected, in order for the IR remote control to function.



#### ·Wireless Projector Trigger

The wireless projector trigger to projector power for easy operation.
Bring your screen up and down by powering on or off your projector.



#### ·Power Cord


Power supply for screen, detachable power cord, convenient for storage.




#### ·Cleaning Tools


Used to clean dust or foreign matter on the screen surface





(The actual standard view area is within the dotted line)





Side view of case

Side view of case (Top cover size)

S PRO P Electric Tension Floor Screen SPEC -Ultra Short Throw Ambient Light Rejecting screen material-											
Aspect Ratio	Diag.Size	Standard View Area		Overall Case Length including space occupied by plug and wire	Overall Height	Upper cover size	Bottom Black Border With housing	Packing Dimension	G.W	N.W	
	(inch)	W	Н	連電源按鍵 總寬度	連幕 Z 總高 Z	L2	х	mm	Kgs	Kgs	
	72"	1594	896	1831	1211	1670	270	1900×240×210	24.00	23.00	
	84"	1860	1046	2077	1436	1905	350	2150×240×210	25.00	24.00	
16:9	92"	2037	1145	2257	1535	2081	350	2300×240×210	26.00	25.00	
	100"	2214	1245	2431	1635	2276	350	2500×240×210	28.00	27.00	
	110"	2435	1370	2687	1760	2528	350	2740×240×210	31.00	30.00	
	120"	2656	1494	2910	1884	2730	350	2970×240×210	33.00	32.00	




## Important Reminder

Due to the large size of the anti light curtain, please measure the elevator and corridor of your home before purchase. For the moment, only elevator direct delivery is supported, not corridor delivery. If the elevator cannot reach the destination, the delivery will be delivered to the downstairs, and you can arrange the transportation by yourself. You can negotiate with the express delivery or handle the extra stair handling costs (please contact customer service for details).



- 3.Please note that when placing this product, please make sure that the product is always in a horizontal state. Do not place the screen in an inclined or vertical position.
- 4. After using for a period of time, if the cover on both ends of the screen is slightly tilted, there is no need to worry. This is a normal phenomenon and does not affect the viewing and use. In addition, due to the cover warping, there is a gap between the screen and the housing case after closing, which is also a normal phenomenon.

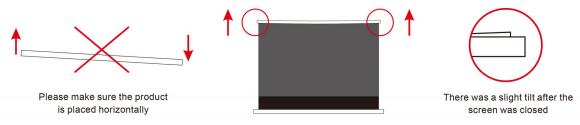



## Warm tips, if you mind the following conditions do not purchase!!!!!

1. When there are a few black spots, white spots, stains and other impurities on the screen surface, but if they are qualified according to the detection method, then such situation is not a product quality problem, and it is within the scope of product qualification.





Figure 1 side view



The detection method is as follows:

- (1). Please raise the screen of this product and close to the wall, and the observer can observe the film at a distance of 3 meters away from the screen;
- (2). The observer needs to observe the shadow in the normal light environment (illumination 500-600lx);
- (3). The distance between the observer and the front of the screen should be kept at a distance of 3 meters, and the center point of the screen should be close to or higher than the horizontal line of sight (as shown in Figure 1), and the observation should be made at the center point, 1 m to the left and 1 m to the right (as shown in Fig. 2).

As long as the test results of the product are within the allowable range, the product is qualified.



For the black spot defect which can be measured in appearance, if it can not be found by visual inspection, the product is normal.



For the appearance of specific measurable white spot defects, if visual inspection can not be found, then the product is normal.



If the visible dirt is within the allowable range of defects, the product is normal.




For the faint linear printing trace, if within the allowable range of defects, the product is normal.



For the inks caused by uneven printing traces, if within the allowable range of defects, the product is normal.

- (1). The white screen is listed as the quality standard because it is not only the reflection surface of the projector image (the black surface is observed from the upper and lower direction, and the white surface is observed from the bottom direction), but also the main function surface of the viewing image, so the white screen is listed as the quality standard. It should be noted that if the white screen surface does not exceed the quality specification, it will be regarded as meeting the factory qualification standard.
- (2).Different from the white screen, the black screen is used as a functional surface to absorb indoor ambient light. In view of the fact that there is no direct correlation between the black screen surface and the image viewing quality, its quality specifications are quite different from that of the white surface. It should be noted that the slight black marks on the black screen surface are inevitable appearance phenomena in the production process of industrial products, which meet the factory qualification standard.
- Conclusion: it should be noted that the slight black marks and white spots on the black screen surface of the anti light projection screen products are normal product appearance phenomena, which will never affect the image viewing quality. Please use it at ease.
- 2. If there are regular creases on the screen surface after the screen is opened, don't worry. This is a normal phenomenon. It is caused by the screen being curled and tightened for a long time, which does not affect the user's viewing. After opening the screen for a period of time, you will notice that the stripes on the screen will gradually disappear.

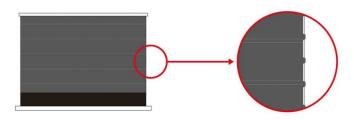

#### **Read More**

**SKU:** S-VIVIDSTORM-ES-SPRO-P-TENSION-72-120

**Price:** \$10000 - \$13900

分類: 電動地升幕




























































3.Please note that when placing this product, please make sure that the product is always in a horizontal state. Do not place the screen in an inclined or vertical position. 4. After using for a period of time. If the core or hoth ends of the screen is slightly titled, there is no need to worry. This is a normal phenomenon and does not affect the viewing and use. In addition, due to the cover warping, there is a gap between the screen and the housing case after locking, which is also a normal phenomenon.







#### Warm tips, if you mind the following conditions do not purchase!!!!!

When there are a few black spots, white spots, stains and other impurities on the screen surface, but if they are qualified according to the detection method, then such situation is not a product quality problem, and it is within the scope of product qualification.





The detection method is as follows:

(I) Please raise the screen of this product and close to the wall, and the observer can observe the film at a distance of 3 meters away from the screen;

(2). The observer needs to observe the shodow in the normal light environment (filminization 500-500b);

(3). The distance between the observer and the fornt of the screen should be keep to a distance of 3 meters and the center point of the screen should be close to or higher than the horizontal line of sight (as showin for a screen should be close to or higher than the horizontal line of sight (as showin for showin first). Zubernordian should be noted the center point, in the first and in the right (as showin for showin first).



For the inks caused by uneven printing traces, if within the allowable range of defects, the product is normal.




usion: it should be noted that the slight black marks and white spots on the black screen surface of anti light projection screen products are normal product appearance phenomena, which will never act the image viewing quality. Pleas use it at ease.

2. If there are regular creases on the screen surface after the screen is opened, don't worry. This is a normal phenomenon. It is caused by the screen being curled and tightened for a long time, which does not affect the user's viewing. After opening the screen for a period of time, you will notice that the stripes on the screen will gradually disappear.







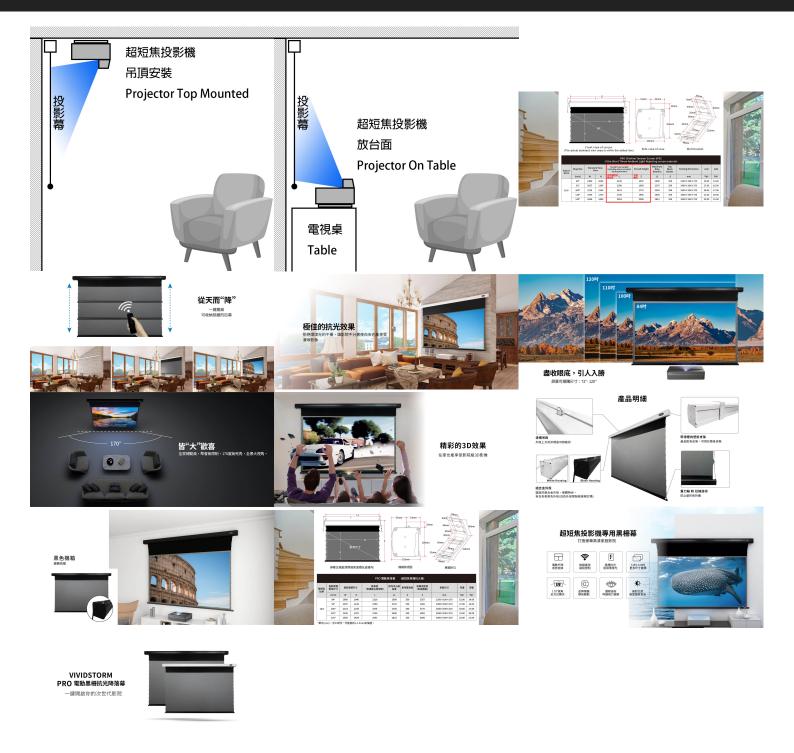

## VIVIDSTORM T-PRO 超短焦 抗光黑柵幕 電動降落幕 黑色機箱(16:9)

- ●黑柵抗光幕(CBSP)幕布材質
- ●卓越的抗光效果-有效抑制上方光線對畫面的影響
- ●適合1800ANSI流明以上的超短焦雷射投影機/鐳射電視
- ●電動升降-收放自如,支持吸頂、壁掛和吊裝方式
- ●雙邊拉線緊繃系統-使幕面平靜
- ●4種控制方式實現上下約20-30秒!
- ●0.6增益,170°視角,3D/4K/8K高清視覺盛宴
- ●靜音管狀電機,電動升降系統,鋁製外殼

#### (客人需要確認樓宇電梯能放入投影幕,及運送到指定樓層,才能安排送貨上門)

支援超短焦雷射投影機,極佳抗光效果,支援4K投影效果,高對比度,高度還完色彩,一鍵升降,帶遙控,可拉線

(黑柵幕最大尺寸係120吋,另外如需白色機箱款,請聯絡本店查詢 3188 4814)

#### VIVIDSTORM 所有專業投影幕一覽表



## VIVIDSTORM PRO 電動黑柵抗光降落幕

一鍵開啟你的次世代影院




## 【很重要】投影機安放位置

黑柵超短焦投影幕,按照投影機安放位置而生產相關幕料, 日後投影機將不能再更改安裝方式,


請客人考慮清楚 投影機是放台面,或吊頂安裝,決定好了 才落訂單,謝謝。



投影機 吊頂安裝 PROJECTOR TOP MOUNTED

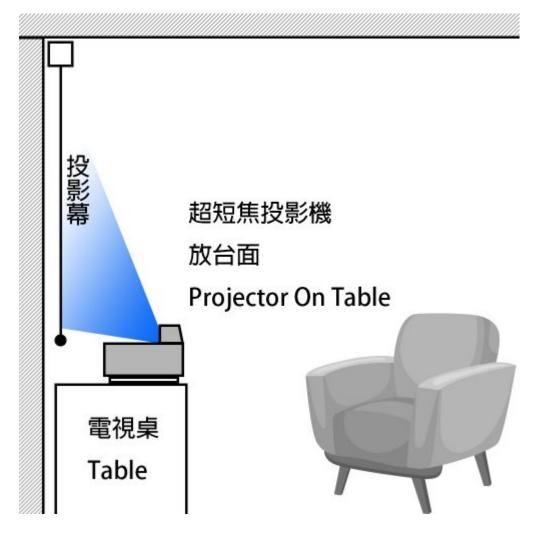

投影機 放台面 PROJECTOR ON TABLE

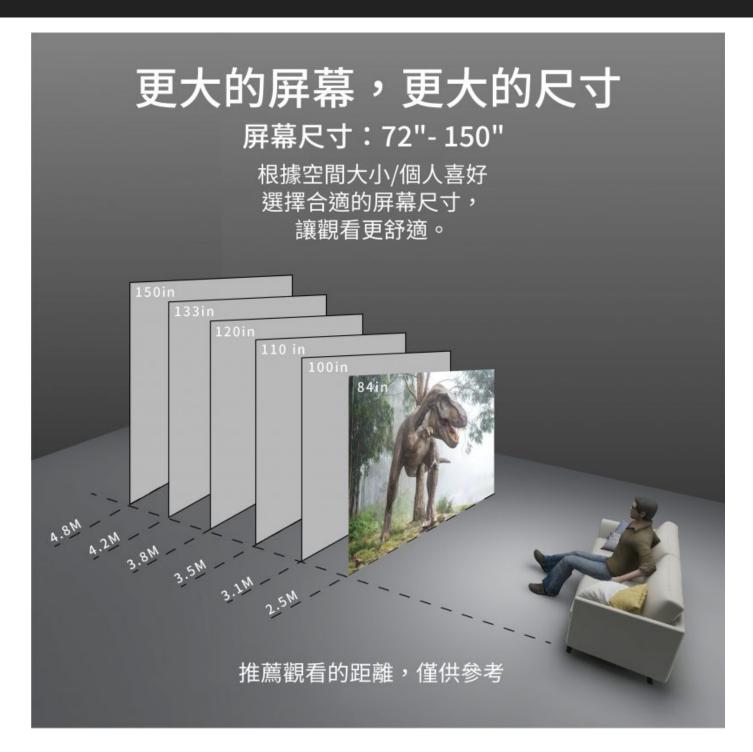

推薦觀看距離:至少2.5米






## 從天而"降"

一鍵開啟 可收納隠藏的巨幕









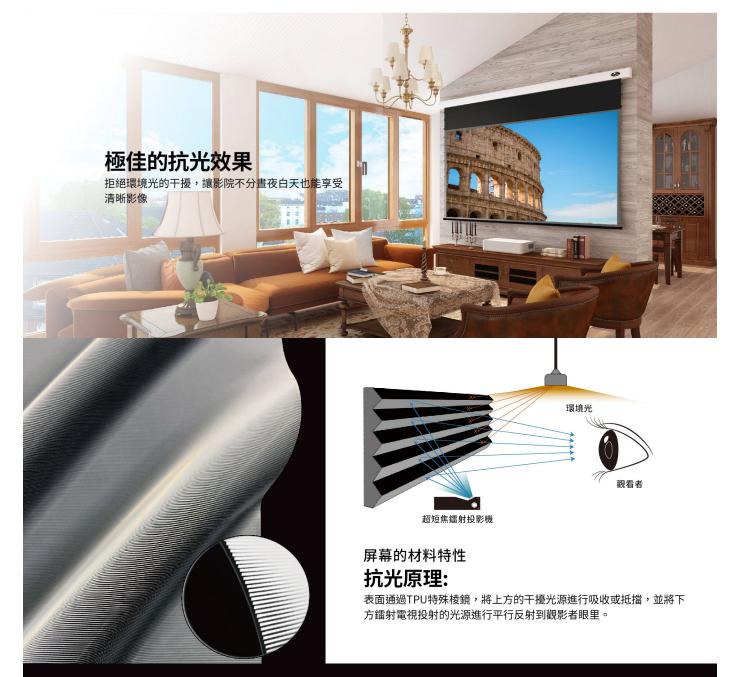

## 抗光光源方向聲明



無法擋住 屏幕左/右/底部的光線



它主要是擋住屏幕上方的光線



屏幕可選購尺寸:72"-120"



#### 精彩的3D效果

在家也能享受影院級3D影像








黑色機箱 <sup>經典百搭</sup>
















屏幕主視圖(實際投影面積在虛線內)

機箱側視圖

機箱掛勾

PRO 電動降落幕 -超短焦黑柵抗光幕-										
投影區 比例	投影面積 對角尺寸	投影面積尺寸		總長度 (含電線占用空間)	掛勾中心點 長度	黑布幕高度	掛幕頂至底 (包括機箱)	包裝尺寸	毛重	净重
	(inch)	w	н	L	L1	s	Z	mm	Kgs	Kgs
16:9	84"	1860	1046	2120	1990	350	1557	2250×190×170	15.00	14.00
	92"	2037	1145	2300	2170	350	1656	2400×190×170	17.00	16.00
	100"	2214	1245	2474	2344	350	1775	2550×190×170	18.00	17.00
	110"	2435	1370	2730	2600	350	1881	2850×190×170	21.00	20.00
	120"	2656	1494	2953	2823	350	2005	3000×190×170	22.00	21.00





#### 🚹 Important Reminder

Due to the large size of the anti light curtain, please measure the elevator and corridor of your home before purchase. For the moment, only elevator direct delivery is supported, not corridor delivery. If the elevator cannot reach the destination, the delivery will be delivered to the downstairs, and you can arrange the transportation by yourself. You can negotiate with the express delivery or handle the extra stair handling costs (please contact customer service for details).






#### 溫馨提示,如介意以下情況請慎拍!!

3m


圖2 側視圖

1、屏幕表面能看到少許黑點、白點、污點等雜質,根據檢測方法檢測合格,則在產品合格範圍內。

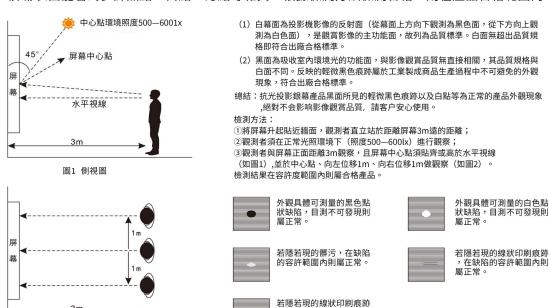


2、屏幕在打開後,幕面上出現有一道道規律的淺顯摺痕,這是由於幕布長時間處於捲曲收緊狀態引 起的,屬於正常現象,不影響觀影。將幕布打開,經過一段時間後,幕布上的條紋會逐漸消失。

在缺陷的容許範圍內則

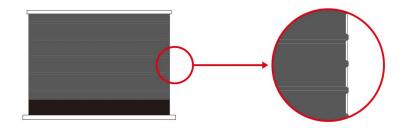

- 3. 放置設備時,請確保設備始終保持水平狀態,不可將幕布傾斜或者垂直放置;
- 4. 屏幕在使用一段時間後,屏幕上方兩端蓋子稍微翹起屬於正常現象,不影響觀影。由於蓋子翹起,導致屏幕關閉後與罩殼有縫隙,也屬於正常現象

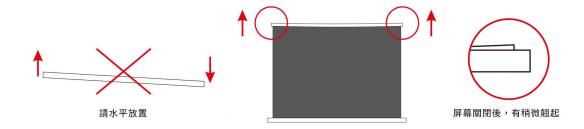



•Wireless RF Remote Control The new remote controls, easy to control the screen.



Extra IR Remote Control
With IR Receiver

The IR remote control required line-ofsight to the IR sensor, The IR receiber has been connected, in order for the IR remote control to function.



·Adjust Rod
Adjust the fixed height of the



•Cleaning Brush For Screen Used to clean dust or foreign matter on the screen surface.



·Wall Bracket With Sliding Groove

End caps on the housing allow for flush Wall or Ceiling insatallation. The screen is installed behind the hook, and the housing is provide with a sliding groove, which can be adjusted to lock the position.



#### ·Wireless Projector Trigger

The wireless projector trigger to projector power for easy operatoin. Bring your screen up and down by powering on or off your projector.

#### Read More

SKU: S-VIVIDSTORM-ES-PRO-DROP-84-120

**Price:** \$9830 - \$13730

**分類: 電動幕** 





























#### 適合超短焦投影機





#### 適合超短焦投影機





### VIVIDSTORM T-PRO-P 超短焦 透聲打孔 抗光黑柵幕 電動降落幕 黑色機箱 (16:9)

- ●黑柵抗光幕(CBSP)幕布材質-【上黑邊打孔設計:屏幕底部黑邊採用0.4mm穿孔聲孔設計,可將音箱放置在幕布後方;如音箱不是放置在幕布後,則無須購買打孔設計】
- ●卓越的抗光效果-有效抑制上方光線對畫面的影響
- ●適合1800ANSI流明以上的超短焦鐳射投影機/鐳射電視
- ●電動升降-收放自如,支持吸頂、壁掛和吊裝方式
- ●雙邊拉線緊繃系統-使幕面平靜
- ●4種控制方式實現上下約20-30秒!
- ●0.6增益,170°視角,3D/4K/8K高清視覺盛宴
- ●靜音管狀電機,電動升降系統,鋁製外殼

#### (客人需要確認樓宇電梯能放入投影幕,及運送到指定樓層,才能安排送貨上門)

支援超短焦雷射投影機,極佳抗光效果,支援4K投影效果,高對比度,高度還完色彩,一鍵升降,帶遙控,可拉線 (黑柵幕最大尺寸係120吋,另外如需白色機箱款,請聯絡本店查詢 3188 4814)

#### VIVIDSTORM 所有專業投影幕一覽表





#### 【很重要】投影機安放位置

黑柵超短焦投影幕,按照投影機安放位置而生產相關幕料, 日後投影機將不能再更改安裝方式,


請客人考慮清楚 投影機是放台面,或吊頂安裝,決定好了 才落訂單,謝謝。



投影機 吊頂安裝 PROJECTOR TOP MOUNTED



投影機 放台面 PROJECTOR ON TABLE

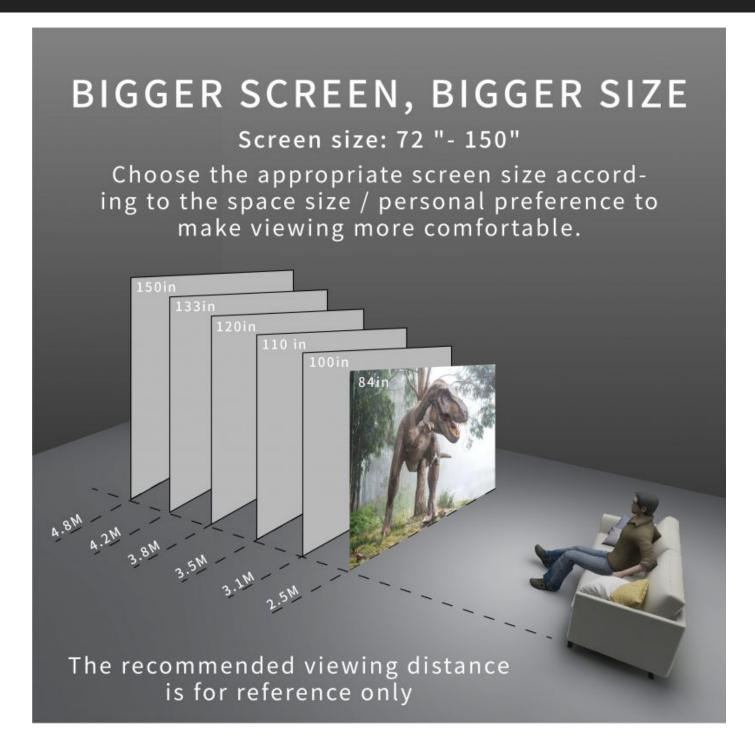

推薦觀看距離: 至少2.5米



Building a luxury HD home theater



Electric lift Easy to open



Wireless remote control



Blocking ambient light



High contrast Highly restored color




Eye protection technology



84"-120" More size options



W Brand motor







#### **3D Surround Sound**

Through micro hole processing, the screen surface aperture is controlled at 0.4mm; the small aperture, while maintaining sound transmission, also greatly reduces the problem of light loss.






#### Free Lifting, One Button Come Ture The "Big World"

Screen Material Features
Ultra Short Throw Ambient Light Rejecting Screen Material

The interference light source above is absorbed by the TPU special prism, and the light source projected by the laser TV below is reflected in parallel.


Motor drop down type electric lifting screen can be match with trigger to realize intelligent linkage.

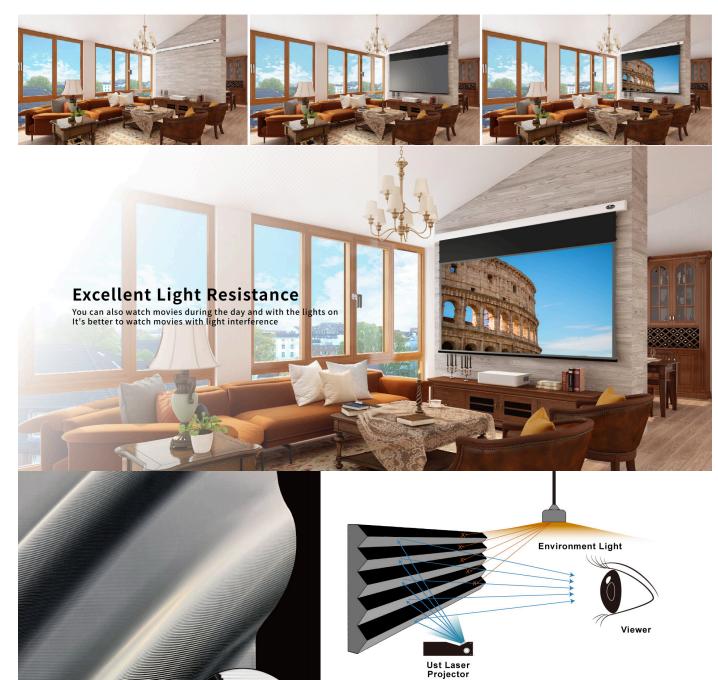





Light from the left / right / bottom of the screen affects the projection



It mainly blocks the light above the screen

## Assemble Brand Motor Smooth operation of the motor, quiet and stable ☑ DC power supply DC power supply, energy saving and environmental protection

#### ☑ Ultra quiet design

The world's leading silent patent technology, helical ultra quiet structure design; sight silent operation, noise as low as 30dB

#### ☑ Limit adjustment Precise limit structure, adjust the ideal height

✓ Overheating protection

Overheated automatic power-off protection ensures the safety and health of the motor

# 120inch 110inch 84inch

Bigger Size, More Wonderful Visual Enjoyment

Screen size: 84"-120"





#### **3D View More Wonderful**

The screen supports the projection of 3D images, making the family view more wonderful





Suspended Hook With Sliding Groove The lifting ring above the shell is movable



Screen cable Prevent deformation and fold



Aluminum Alloy Shell Solid aluminum alloy shell, beautiful and fashionable. Available white and black housing





Wall Bracket With Sliding Groove
The product is equipped with bracket which
can be used for hanging installation



0.4mm sound hole Sound can be emitted through small holes in the back boder of the screen



Gravity Shaft And Stay Wire Technology Prevent deformation and fold



Black Housing Classic works



White Housing
Pure fashion



•Wireless RF Remote Control
The new remote controls, easy to control the screen.



With IR Receiver
The IR remote control required line-ofsight to the IR sensor, The IR receiber
has been connected, in order for the
IR remote control to function.



Adjust Rod
 Adjust the fixed height of the screen.



•Cleaning Brush For Screen
Used to clean dust or foreign
matter on the screen surface.



·Wall Bracket With Sliding Groove


End caps on the housing allow for flush Wall or Ceiling insatallation. The screen is installed behind the hook, and the housing is provide with a sliding groove, which can be adjusted to lock the position.





·Wireless Projector Trigger

The wireless projector trigger to projector power for easy operatoin. Bring your screen up and down by powering on or off your projector.










Side view of case



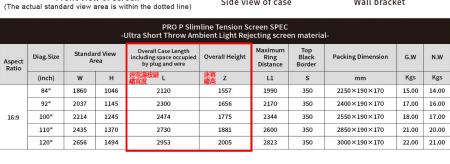




#### 🦺 Important Reminder

Due to the large size of the anti light curtain, please measure the elevator and corridor of your home before purchase. For the moment, only elevator direct delivery is supported, not corridor delivery. If the elevator cannot reach the destination, the delivery will be delivered to the downstairs, and you can arrange the transportation by yourself. You can negotiate with the express delivery or handle the extra stair handling costs (please contact customer service for details).



- 3.Please note that when placing this product, please make sure that the product is always in a horizontal state. Do not place the screen in an inclined or vertical position.
- 4. After using for a period of time, if the cover on both ends of the screen is slightly tilted, there is no need to worry. This is a normal phenomenon and does not affect the viewing and use. In addition, due to the cover warping, there is a gap between the screen and the housing case after closing, which is also a normal phenomenon.

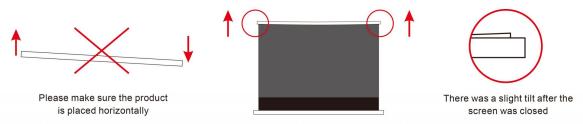



#### Warm tips, if you mind the following conditions do not purchase!!!!!

1. When there are a few black spots, white spots, stains and other impurities on the screen surface, but if they are qualified according to the detection method, then such situation is not a product quality problem, and it is within the scope of product qualification.





Figure 1 side view



1.94.0 - 1.

The detection method is as follows:

- (1). Please raise the screen of this product and close to the wall, and the observer can observe the film at a distance of 3 meters away from the screen;
- (2). The observer needs to observe the shadow in the normal light environment (illumination 500-600lx);
- (3). The distance between the observer and the front of the screen should be kept at a distance of 3 meters, and the center point of the screen should be close to or higher than the horizontal line of sight (as shown in Figure 1), and the observation should be made at the center point, 1 m to the left and 1 m to the right (as shown in Fig. 2).

As long as the test results of the product are within the allowable range, the product is qualified.



For the black spot defect which can be measured in appearance, if it can not be found by visual inspection, the product is normal.



For the appearance of specific measurable white spot defects, if visual inspection can not be found, then the product is normal.



If the visible dirt is within the allowable range of defects, the product is normal.




For the faint linear printing trace, if within the allowable range of defects, the product is normal.



For the inks caused by uneven printing traces, if within the allowable range of defects, the product is normal.

- (1). The white screen is listed as the quality standard because it is not only the reflection surface of the projector image (the black surface is observed from the upper and lower direction, and the white surface is observed from the bottom direction), but also the main function surface of the viewing image, so the white screen is listed as the quality standard. It should be noted that if the white screen surface does not exceed the quality specification, it will be regarded as meeting the factory qualification standard.
- (2). Different from the white screen, the black screen is used as a functional surface to absorb indoor ambi ent light. In view of the fact that there is no direct correlation between the black screen surface and the image viewing quality, its quality specifications are quite different from that of the white surface. It should be noted that the slight black marks on the black screen surface are inevitable appearance phe nomena in the production process of industrial products, which meet the factory qualification standard.
- Conclusion: it should be noted that the slight black marks and white spots on the black screen surface of the anti light projection screen products are normal product appearance phenomena, which will never affect the image viewing quality. Please use it at ease.
- 2. If there are regular creases on the screen surface after the screen is opened, don't worry. This is a normal phenomenon. It is caused by the screen being curled and tightened for a long time, which does not affect the user's viewing. After opening the screen for a period of time, you will notice that the stripes on the screen will gradually disappear.

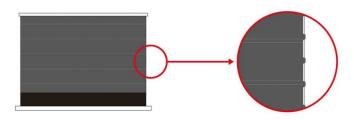

#### Read More

SKU: S-VIVIDSTORM-ES-PRO-P-DROP-84-120

**Price:** \$9830 – \$13730

**分類: 電動幕**□

#### **INDEX**

#### ٧

VIVIDSTORM S-PRO 超短焦 抗光黑柵幕 電動地升幕 黑色機箱 (16

-9) 3

VIVIDSTORM S-PRO-P 超短焦 透聲打孔 抗光黑柵幕 電動地升幕 黑色機箱 (16

-9) 14

VIVIDSTORM T-PRO 超短焦 抗光黑柵幕 電動降落幕 黑色機箱 (16

-9) 27

VIVIDSTORM T-PRO-P 超短焦 透聲打孔 抗光黑柵幕 電動降落幕 黑色機箱 (16

-9) 41